



DS-1100KI Network Keyboard

User Manual

Legal Information

©2022 Hangzhou Hikvision Digital Technology Co., Ltd. All rights reserved.

About this Manual

The Manual includes instructions for using and managing the Product. Pictures, charts, images and all other information hereinafter are for description and explanation only. The information contained in the Manual is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version of this Manual at the Hikvision website (<https://www.hikvision.com/>).

Please use this Manual with the guidance and assistance of professionals trained in supporting the Product.

Trademarks

HIKVISION and other Hikvision's trademarks and logos are the properties of Hikvision in various jurisdictions.

Other trademarks and logos mentioned are the properties of their respective owners.

Disclaimer

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THIS MANUAL AND THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND FIRMWARE, ARE PROVIDED "AS IS" AND "WITH ALL FAULTS AND ERRORS". HIKVISION MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, OR FITNESS FOR A PARTICULAR PURPOSE. THE USE OF THE PRODUCT BY YOU IS AT YOUR OWN RISK. IN NO EVENT WILL HIKVISION BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA, CORRUPTION OF SYSTEMS, OR LOSS OF DOCUMENTATION, WHETHER BASED ON BREACH OF CONTRACT, TORT (INCLUDING NEGLIGENCE), PRODUCT LIABILITY, OR OTHERWISE, IN CONNECTION WITH THE USE OF THE PRODUCT, EVEN IF HIKVISION HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES OR LOSS.

YOU ACKNOWLEDGE THAT THE NATURE OF THE INTERNET PROVIDES FOR INHERENT SECURITY RISKS, AND HIKVISION SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER-ATTACK, HACKER ATTACK, VIRUS INFECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, HIKVISION WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED.

YOU AGREE TO USE THIS PRODUCT IN COMPLIANCE WITH ALL APPLICABLE LAWS, AND YOU ARE SOLELY RESPONSIBLE FOR ENSURING THAT YOUR USE CONFORMS TO THE APPLICABLE LAW. ESPECIALLY, YOU ARE RESPONSIBLE, FOR USING THIS PRODUCT IN A MANNER THAT DOES NOT INFRINGE ON THE RIGHTS OF THIRD PARTIES, INCLUDING WITHOUT LIMITATION, RIGHTS OF PUBLICITY, INTELLECTUAL PROPERTY RIGHTS, OR DATA PROTECTION AND OTHER PRIVACY RIGHTS. YOU SHALL NOT USE THIS PRODUCT FOR ANY PROHIBITED END-USES, INCLUDING THE DEVELOPMENT OR PRODUCTION OF WEAPONS OF MASS DESTRUCTION, THE DEVELOPMENT OR

DS-1100KI Network Keyboard User Manual

PRODUCTION OF CHEMICAL OR BIOLOGICAL WEAPONS, ANY ACTIVITIES IN THE CONTEXT RELATED TO ANY NUCLEAR EXPLOSIVE OR UNSAFE NUCLEAR FUEL-CYCLE, OR IN SUPPORT OF HUMAN RIGHTS ABUSES.

IN THE EVENT OF ANY CONFLICTS BETWEEN THIS MANUAL AND THE APPLICABLE LAW, THE LATTER PREVAILS.

Regulatory Information

FCC Information

Please take attention that changes or modification not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC compliance: This equipment has been tested and found to comply with the limits for a Class B digital device, a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment should be installed and operated with a minimum distance 20cm between the radiator and your body.

FCC Conditions

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference.
- This device must accept any interference received, including interference that may cause undesired operation.

EU Conformity Statement



This product and - if applicable - the supplied accessories too are marked with "CE" and comply therefore with the applicable harmonized European standards listed under the RE Directive 2014/53/EU, the EMC Directive 2014/30/EU, LVD Directive 2014/35/EU, the RoHS Directive 2011/65/EU.



2012/19/EU (WEEE directive): Products marked with this symbol cannot be disposed of as unsorted municipal waste in the European Union. For proper recycling, return this product to your local supplier upon the purchase of equivalent new equipment, or dispose of it at designated

collection points. For more information see:

<http://www.recyclethis.info>.



2006/66/EC (battery directive): This product contains a battery that cannot be disposed of as unsorted municipal waste in the European Union. See the product documentation for specific battery information. The battery is marked with this symbol, which may include lettering to indicate cadmium (Cd), lead (Pb), or mercury (Hg). For proper recycling, return the battery to your supplier or to a designated collection point. For more information see: <http://www.recyclethis.info>.

Industry Canada ICES-003 Compliance

This device meets the CAN ICES-3 (B)/NMB-3(B) standards requirements.

Industry Canada ICES-003 Compliance

This device meets the CAN ICES-3 (B)/NMB-3(B) standards requirements.

1. This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: this device may not cause interference, and
2. this device must accept any interference, including interference that may cause undesired operation of the device.

1. Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radioexempts de licence. L'exploitation est autorisée aux deux conditions suivantes : l'appareil ne doit pas produire de brouillage, et
2. l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.

This equipment should be installed and operated with a minimum distance 20cm between the radiator and your body.

Cet équipement doit être installé et utilisé à une distance minimale de 20 cm entre le radiateur et votre corps.

Preface

This section is to ensure that you can avoid danger or property loss in the process of using the product. Before using the product, please read the user manual carefully and keep it for future reference.

Get More Information

Visit our website (<http://www.hikvision.com/>) for user manuals, application tools and development materials.

Applicable Model

This manual is applicable to DS-1100KI Network Keyboard.




Important Clause

Please strictly abide by the applicable laws and regulations for the use and maintenance of monitoring interface. It is illegal to use video monitoring device for illegal purposes, or to explore other people's privacy.

Symbol Conventions

The symbols that may be found in this document are defined as follows.

Symbol	Description
--------	-------------

Symbol	Description
 Danger	Indicates a hazardous situation which, if not avoided, will or could result in death or serious injury.
 Caution	Indicates a potentially hazardous situation which, if not avoided, could result in equipment damage, data loss, performance degradation, or unexpected results.
 Note	Provides additional information to emphasize or supplement important points of the main text.

Operation Convention

The following operations may be found in this document are defined as follows.

Operation	Description
Press Number + REGION	<ul style="list-style-type: none"> ● Press a numeric button and REGION button to select a region. ● Number represents region ID. Go to region menu for the ID.
Press Number + WALL	<ul style="list-style-type: none"> ● Press a numeric button and WALL button to select a video wall. ● Number represents video wall ID. Go to video wall client for the ID.
Press Number + WIN	<ul style="list-style-type: none"> ● Press a numeric button and WIN button to select a sub-window. ● In video wall mode, if the monitor is divided in to multiple windows, the number represents sub-window ID.
Press Number + MON	<ul style="list-style-type: none"> ● If device is video wall or decoder: <ul style="list-style-type: none"> ○ Press a numeric button and MON button to select a monitor. ○ Number represents monitor ID. Go to video wall client for the ID. ● If device is video recorder: <ul style="list-style-type: none"> ○ Press a numeric button and MON button to select an output channel.

Operation	Description
	<ul style="list-style-type: none"> ○ Number represents output channel ID. Go to Keyboard → Channel → Output Channel for the ID. ●
Press Number + CAM	<p>Keyboard mode:</p> <ul style="list-style-type: none"> ○ Press a numeric button and CAM button to select an output channel. ○ Number represents input channel ID. Go to Keyboard → Channel → Input Channel for the ID. ● HikCentral/iSecure mode: <ul style="list-style-type: none"> ○ Press a numeric button and CAM button to select a camera. ○ Number represents camera ID. Check camera ID in resource list. ●
Press Number + CAM-G	<ul style="list-style-type: none"> ● Press a numeric button and CAM-G button to select an input channel group. ● Number represents input channel group ID. Go to Keyboard → Channel → Camera Group for the ID.
Press Number + MACRO	<ul style="list-style-type: none"> ● Press a numeric button and MACRO button to select a macro. ● Number represents macro ID. Go to Keyboard → Macro for the ID.
Press Number + GROUP	<ul style="list-style-type: none"> ● Press a numeric button and GROUP button to select a group. ● Number represents group ID. Go to Keyboard > Group for the ID.
Press Number + MULT	<ul style="list-style-type: none"> ● Press a numeric button and MULT button to divide monitor. ● Number represents sub-window quantity.
Press Number + SCENE	<ul style="list-style-type: none"> ● Press a numeric button and SCENE button to switch video wall scene. ● Number represents scene ID. Check the ID in video wall mode.

Safety Instructions

Danger

- This equipment is not suitable for use in locations where children are likely to be present.
 - Do not ingest battery. Chemical burn hazard!
 - This product contains a coin/button cell battery. If the coin/button cell battery is swallowed, it can cause severe internal burns in just 2 hours and can lead to death.
 - Keep new and used batteries away from children.
 - If the battery compartment does not close securely, stop using the product and keep it away from children.
 - If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.
 - CAUTION: Risk of explosion if the battery is replaced by an incorrect type.
 - Improper replacement of the battery with an incorrect type may defeat a safeguard (for example, in the case of some lithium battery types).
 - Do not dispose of the battery into fire or a hot oven, or mechanically crush or cut the battery, which may result in an explosion.
 - Do not leave the battery in an extremely high temperature surrounding environment, which may result in an explosion or the leakage of flammable liquid or gas.
 - Do not subject the battery to extremely low air pressure, which may result in an explosion or the leakage of flammable liquid or gas.
 - Dispose of used batteries according to the instructions.
-

Caution

- + identifies the positive terminal(s) of equipment which is used with, or generates direct current.
- identifies the negative terminal(s) of equipment which is used with, or generates direct current.
 - No naked flame sources, such as lighted candles, should be placed on the equipment.
 - The ventilation should not be impeded by covering the ventilation openings with items, such as newspapers, table-cloths, curtains, etc. The openings shall never be blocked by placing the equipment on a bed, sofa, rug or other similar surface.
 - Keep a minimum 50 cm distance around the equipment for sufficient ventilation.
 - The USB port of the equipment is used for connecting to a mouse, a keyboard, or a USB flash drive only.
-

Contents

Chapter 1 Legal Information	i
Chapter 1 Regulatory Information	iii
Chapter 1 Preface	v
1.1 Get More Information	v
1.2 Applicable Model	v
1.3 Important Clause	v
1.4 Symbol Conventions	v
1.5 Operation Convention	vi
1.6 Safety Instructions	viii
Chapter 1 Product Introduction	1
Chapter 2 Activation	2
2.1 Local Menu Activation	2
2.2 SADP Activation	3
2.3 Web Activation	3
Chapter 3 Network	4
Chapter 4 Keyboard	5
4.1 Login	5
4.2 Add Devices	6
4.2.1 Manually Add	6
4.2.2 Add in Batches	8
4.2.2.1 Add Online Devices in Batches	8
4.2.2.2 Import Input Channels in Batches	9
4.3 Local Live View	10
4.3.1 Preview by Operating Touchscreen	10
4.3.2 Preview by Operating Keyboard Shortcut	10
4.3.3 PTZ Control	11
4.3.3.1 General Operation	11
4.3.3.2 Set and Call Preset	12
4.3.3.3 Set and Call Patrol	13
4.3.3.4 Set and Call Pattern	14
4.4 Video Wall	15
4.4.1 Video Wall Configuration	15
4.4.1.1 Configure Region	15
4.4.1.2 Link Output Channel to Video Wall	16
4.4.2 Video Wall Control	17
4.4.2.1 Layout Operation	17
4.4.2.2 Window Operation	18
4.4.2.3 Scene Operation	19

4.4.3	PTZ Control	20
4.4.4	Group and Macro	20
4.5	Playback	21
4.5.1	Local Playback	21
4.5.1.1	Instant Playback	21
4.5.1.2	Playback by Time	21
4.5.1.3	Playback Control	21
4.5.2	Video Wall Playback	22
4.5.2.1	Instant Playback	22
4.5.2.2	Playback by Time	22
4.5.2.3	Playback Control	22
4.6	Channel Management	23
4.6.1	Edit Channel	23
4.6.2	Output Channel	24
4.6.3	Camera Group	24
4.7	User Management	26
4.8	Video Recorder	27
4.8.1	Remote Panel	27
4.8.2	Live View	30
4.8.3	PTZ Control	30
4.8.4	Playback	30
4.9	Connect the Device Through Serial Ports	31
4.9.1	Connect Video Recorders	31
4.9.2	Connect Analog Matrix	33
4.9.3	Connect Analog Dome	33
Chapter 5 iSecure Mode		
5.1	Login	35
5.2	Resource List	36
5.3	Local Live View	37
5.3.1	Enable Local Live View	37
5.3.2	PTZ Operation	39
5.4	Video Wall Operation	37
5.4.1	Region Configuration	37
5.4.2	Video Wall Control	38
5.4.3	PTZ Operation	39
5.5	Video Wall Playback	39
Chapter 6 HikCentral Mode		
6.1	Login	40
6.2	Resource List	41
6.3	Local Live View	41
6.3.1	Enable Local Live View	41

6.3.2 PTZ Operation	44
6.4 Video Wall Operation	43
6.4.1 Region Configuration	43
6.4.2 Video Wall Control	44
6.4.3 PTZ Operation	44
6.5 Video Wall Playback	44
Chapter 7 System	45
7.1 Language	45
7.2 Hardware	45
7.3 Storage	46
7.3.1 FTP Storage	46
7.3.2 USB Storage	47
7.4 Upgrade	47
7.4.1 FTP Upgrade	47
7.4.2 USB Flash Drive Upgrade	47
7.5 Import/Export Configuration File	47
7.6 Factory Default	48
7.7 Auxiliary Key	48
7.8 Lock Keyboard	48
Chapter 8 Web Configuration	49
8.1 Login	49
8.2 Add Devices	49
8.2.1 Manually Add	49
8.2.2 Import Input Channels in Batches	52
8.3 Channel Management	53
8.3.1 Edit Channel	53
8.3.2 Camera Group	54
8.4 Serial Port Settings	55
8.5 Network	56
8.6 System Settings	57
8.6.1 Version	57
8.6.2 User Management	57
8.6.3 System Maintenance	59
8.6.4 Log Management	60
8.6.5 Security Settings	60

Chapter 1 Product Introduction

DS-1100KI is a network keyboard independently developed by Hikvision. It features in 7-inch full view multi-touch LCD screen and four-dimensional joystick. It supports network access to DVR, DVS, NVR, network camera, network dome, video integrated platform, decoder, iSecure, HikCentral and other platform software, with powerful functions and quick and simple operations. It can be widely used in finance, public security, telecommunication, transportation, electric power, education, water conservancy and other fields.

Chapter 2 Activation

You can activate network keyboard via local menu, SADP client or Web interface.

2.1 Local Menu Activation

For the first-time access, you need to activate the network keyboard by setting an admin password.

Steps

1. Connect your network keyboard power supply to an electrical outlet, and turn on the network keyboard.
The activation interface will be popped up automatically.
2. Set password and confirm it.

Warning

We highly recommend you create a strong password of your own choosing (Using a minimum of 8 characters, including at least three of the following categories: upper case letters, lower case letters, numbers, and special characters.) in order to increase the security of your product. And we recommend you reset your password regularly, especially in the high security system, resetting the password monthly or weekly can better protect your product.

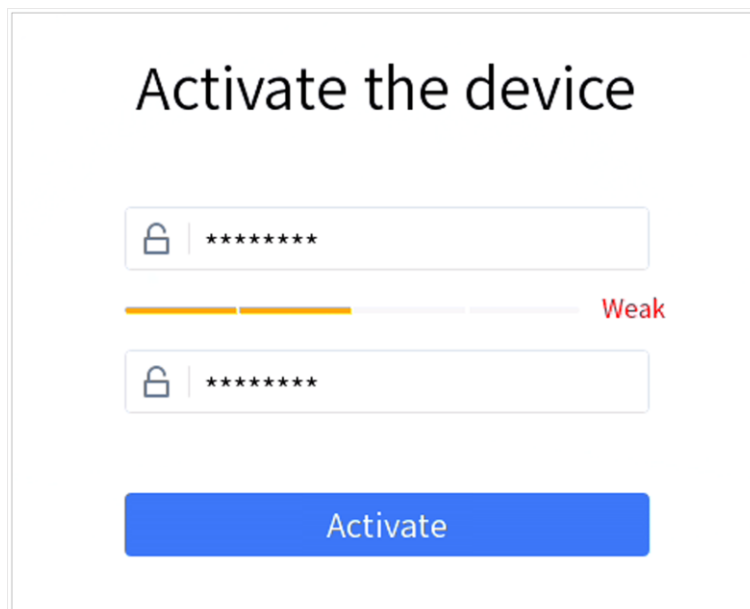


Figure 2-1 Activation

3. Tap **Activate**.

2.2 SADP Activation

SADP software is used for detecting the online device, activating the device, and resetting its password.

Get the SADP software from the supplied disk or the official website, and install the SADP according to the prompts.

Steps

1. Connect your network keyboard power supply to an electrical outlet, and turn on the network keyboard.
2. Run the SADP software downloaded from our website to search the online devices.
3. Check the keyboard status from the device list, and select the inactive keyboard.
4. Enter the new password in the password field, and confirm it.

Warning

- 8 to 16 characters allowed, including at least two of the following: digits, upper case letters, lower case letters and special characters. **STRONG PASSWORD RECOMMENDED**– We highly recommend you create a strong password of your own choosing (using a minimum of 8 characters, including upper case letters, lower case letters, numbers, and special characters) in order to increase the security of your product. And we recommend you reset your password regularly, especially in the high security system, resetting the password monthly or weekly can better protect your product.
-

5. Click **Activate**.

2.3 Web Activation

After editing the PC and the network keyboard to the same network segment, you can directly log in to the web interface of the network keyboard to activate.

Chapter 3 Network

Network parameters must be properly configured before you can add network devices and operate the network keyboard over network.

Steps

1. Go to **System** → **Network**.
2. Configure network parameters.
 - Enable **DHCP** to obtain IP settings automatically.
 - Manually enter IP address, subnet mask, and gateway.
 - Enable **SADP** to search devices, change IP addresses through SADP software.
3. Tap **Save**.

The screenshot shows a configuration interface with the following elements:

- DHCP**: A toggle switch that is currently turned off (grey).
- IP Address**: A text input field containing the value 192.168.1.100.
- Subnet Mask**: A text input field containing the value 255.255.255.0.
- Gateway**: A text input field containing the value 192.168.1.1.
- MAC Address**: A text input field containing the value 00:0C:29:00:00:00.
- SSH**: A toggle switch that is currently turned off (grey).
- SADP**: A toggle switch that is currently turned on (green).
- Save**: A blue button located at the bottom right of the form.

Figure 3-1 Network Parameters


Chapter 4 Keyboard

Keyboard mode is mainly applied to small-sized projects. Network keyboard works as a control center and manages security devices in it.

4.1 Login

Steps

1. Tap **Keyboard** at home page.

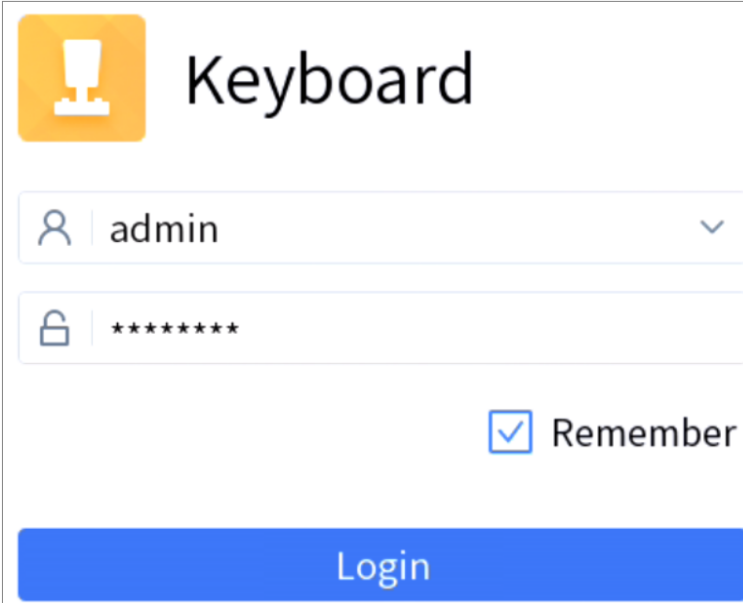

The screenshot shows a login interface for a device named 'Keyboard'. At the top left is an orange square icon containing a white keyboard symbol. To its right is the word 'Keyboard' in a large, black, sans-serif font. Below this is a user selection dropdown menu with a person icon on the left, the text 'admin', and a downward arrow on the right. Underneath is a password field with a lock icon on the left and seven asterisks '*****' in the center. To the right of the password field is a checkbox with a blue checkmark and the text 'Remember'. At the bottom of the form is a wide, blue button with the word 'Login' in white text.

Figure 4-1 Login

2. Enter user name and password.
3. Optional: Check **Remember**.
4. Tap **Login**.

Note

If you enter the wrong password 7 times for administrator or 5 times for operator, the current user account will be locked for 30 minutes.


4.2 Add Devices

Up to 4000 devices can be added.

4.2.1 Manually Add

Steps

1. Go to **Keyboard** → **Device**.

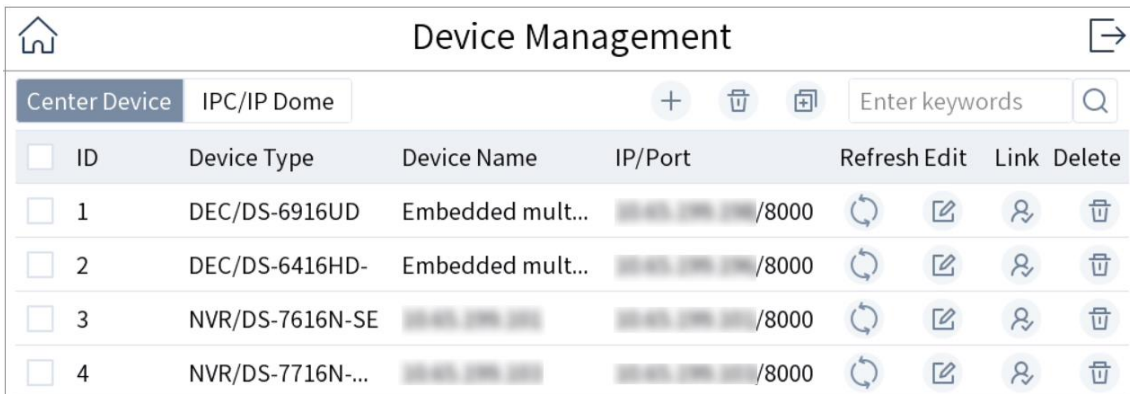

<input type="checkbox"/>	ID	Device Type	Device Name	IP/Port	Refresh	Edit	Link	Delete
<input type="checkbox"/>	1	DEC/DS-6916UD	Embedded mult...	192.168.1.100/8000				
<input type="checkbox"/>	2	DEC/DS-6416HD-	Embedded mult...	192.168.1.101/8000				
<input type="checkbox"/>	3	NVR/DS-7616N-SE	192.168.1.102	192.168.1.102/8000				
<input type="checkbox"/>	4	NVR/DS-7716N-...	192.168.1.103	192.168.1.103/8000				

Figure 4-2 Device Management

2. Tap **Center Device** or **IPC/IP Dome** as desired.
3. Tap .
4. Enter device IP address, port, user name, and password.

Note

- The device name is obtained automatically or can be configured as required.
- If you enable the stream encryption for the device, you need to enter the verification code when adding the device.

5. Check or uncheck **Add Video Recorder Output**.

Note

Check **Add Video Recorder Output**, and the output port type, channel number and other information will be listed in the output port list.

6. Tap **OK**.

Add Center Device

ID	<input type="text"/>
Device	<input type="text"/>
IP*	<input type="text" value="192.168.1.1"/>
Port*	<input type="text" value="8000"/>
User*	<input type="text" value="admin"/>
Password*	<input type="password"/>
Code	<input type="text"/>
<input type="checkbox"/>	Add Video Recorder Output (Not Recommended).

Figure 4-3 Add Center Device

Add IPC Device

Device	<input type="text"/>
IP*	<input type="text" value="192.168.1.1"/>
Port*	<input type="text" value="8000"/>
User*	<input type="text" value="admin"/>
Password*	<input type="password"/>
Code	<input type="text"/>
Protocol*	<input checked="" type="radio"/> Default <input type="radio"/> ONVIF
<input type="button" value="OK"/> <input type="button" value="Cancel"/>	

Figure 4-4 Add Network Camera

4.2.2 Add in Batches

Add Online Devices in Batches

You can add the devices with the same user name and password in batches.

Steps

1. Go to **Keyboard** → **Device**.

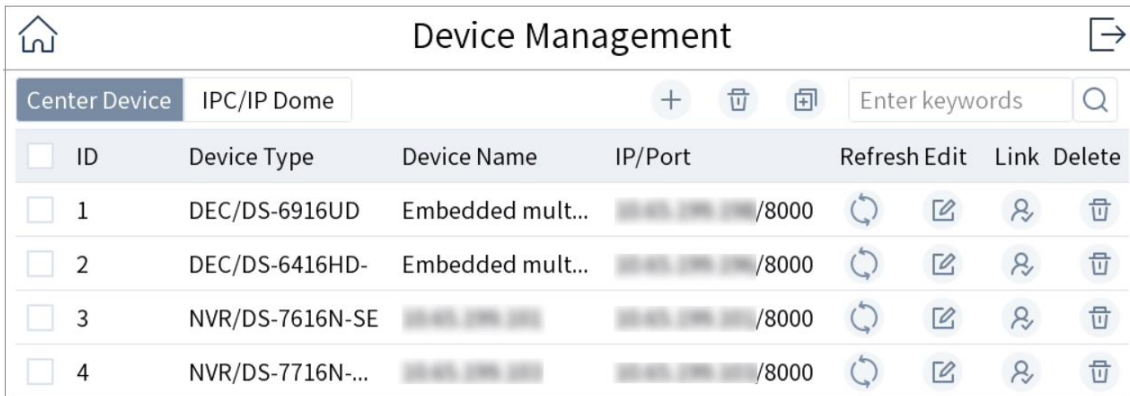


Figure 4-5 Device Management

2. Tap to enter **Add by SADP** interface.



Figure 4-6 Online Devices

3. Check the devices to be added and tap .

4. Enter user name and password.

5. Tap **Add**.

Import Input Channels in Batches

The information of added input channel can be generated into an excel file and exported to the USB flash drive for backup.

Before You Start

Connect an USB flash drive to the network keyboard.

Steps

1. Go to **Keyboard** → **Channel**.
2. Export input channel template.
 - 1) Tap to export an excel file.
 - 2) Edit the file on your computer, like adding or deleting input channels.
 - 3) Copy the file to an USB flash drive and connect it to your network keyboard.


3. Tap  to import input channels.

4.3 Local Live View

Preview an input channel in keyboard touchscreen.

4.3.1 Preview by Operating Touchscreen


Steps

1. Go to **Keyboard** → **Channel**.
2. Select the channel and tap  to preview.

4.3.2 Preview by Operating Keyboard Shortcut

Press the keys of the keyboard to preview the input channel.

Steps

1. Press **0+MON**.
2. Preview the channel as desired.
 - Press **Num+CAM** to preview the signal of the corresponding channel.
 - Press **Num+CAM-G** to preview the camera group.
 - Tap  in the touchscreen and select the channel or the camera group as desired to preview.

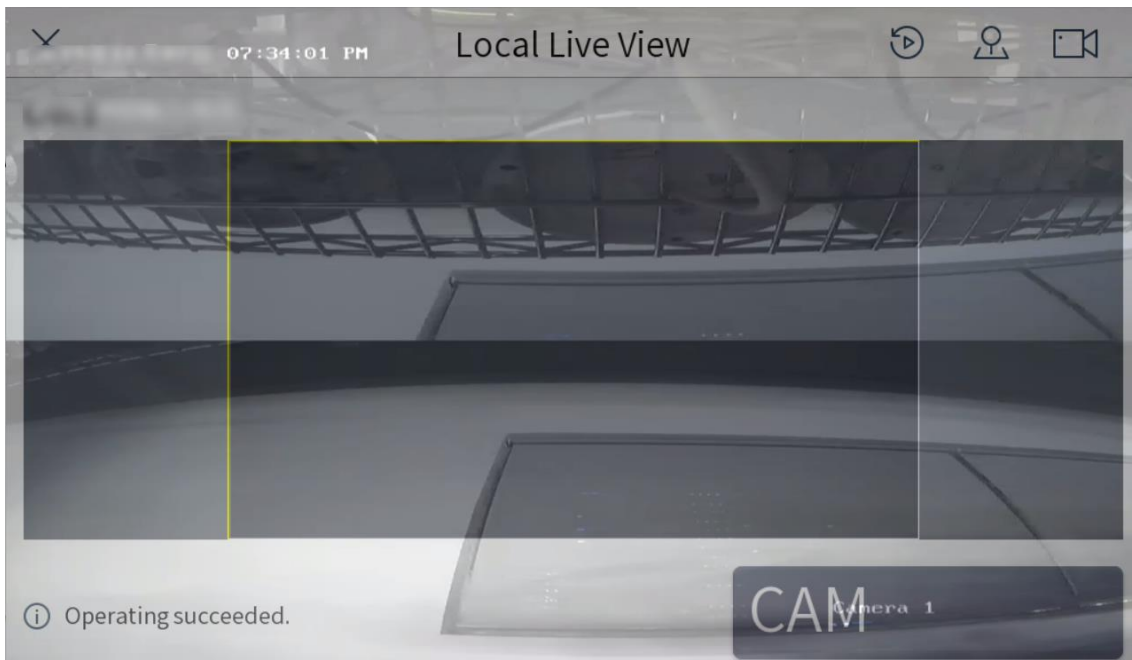



Figure 4-7 Local Live View

3. You can do the following operations.

- | | |
|-------------------------|---|
| 4-Screen Preview | <ul style="list-style-type: none"> ● Press 4+MULT to switch the current image into 4 screens, and tap any screen to preview the images of different cameras. ● Press 1+MULT to return the previous image. |
| Switch Channels | Press PREV/NEXT to switch to the previous or next channel. |
| Full Screen | Press ESC to switch to the full screen. |
| Capture Images | Press the top of the rocker to capture a image. |
| Clip Videos | Press  to start clipping and press it again to stop clipping. |

4. Press **0+CAM** to stop previewing.

 **Note**

- You can preview the channel with up to 4K resolution.
 - Press **Num+CAM** to control PTZ without previewing images from speed domes.
 - The captured image and the recording can be saved in USB flash drive or uploaded to FTP server. For FTP configuration, see **Storage**.
-

4.3.3 PTZ Control

You can control the added speed dome, like control PTZ movement, turn on/off light, turn on/off wiper, zoom in/out, increase/decrease focus, increase/decrease iris, set/call preset, patrol and pattern.

General Operation

Steps

1. Preview speed dome image.

 **Note**

For detailed steps, see **Preview by Operating Touchscreen** and **Preview by Operating Keyboard Shortcut**.

2. Move joystick and press buttons of keyboard to control PTZ.

Table 4-1 Buttons Description




Button	Description	Button	Description
LIGHT	Turn on/off light.	WIPER	Turn on/off wiper.

Button	Description	Button	Description
FOCUS+	Increase focus.	FOCUS-	Decrease focus.
IRIS+	Increase iris.	IRIS-	Decrease iris.
ZOOM+	Zoom in.	ZOOM-	Zoom out.
PRESET	Set/call preset.	PATROL	Set/call patrol.
PATTERN	Set/call pattern and start/stop auto-scan.	Joystick	Rotate PTZ.

Set and Call Preset

You can record the horizontal positions, vertical positions and lens magnification of the preset point by setting a preset point. To quickly monitor a certain target, you can call out the preset position by operating the keyboard.

By Operating Touchscreen

1. Preview speed dome image. For detailed steps, see [Preview by Operating Touchscreen](#) and [Preview by Operating Keyboard Shortcut](#).
2. Set a preset.
 - a. Tap .
 - b. Tap **Preset**.
 - c. Rotate the joystick to move PTZ to a desired position.
 - d. Tap  to set a preset.
3. Tap  to call the preset.




By Operating Keyboard Shortcut

1. Preview speed dome image. For detailed steps, see [Preview by Operating Touchscreen](#) and [Preview by Operating Keyboard Shortcut](#).
2. Rotate the joystick to move PTZ to a desired position.
3. Set a preset.
 - a. Press **SET** to start setting. The SET button turns red.
 - b. Press **Num+PRESET** to set the current position as corresponding preset.
 - c. Press **SET** to finish setting.
4. Press **Num+PRESET** to call the preset.

Set and Call Patrol

Patrol means that PTZ moves among several presets. PTZ will stay in a preset for a duration before moving on to the next preset.

By Operating Touchscreen

1. Preview speed dome image. For detailed steps, see [**Preview by Operating Keyboard Shortcut**](#) and [**Preview by Operating Touchscreen**](#).
2. Set a patrol.
 - a. Tap .
 - b. Tap **Patrol**.
 - c. Tap  of a desired patrol.
 - d. Tap **Add Preset** to add presets, including their speed and duration time, in the patrol.
 - e. Tap **OK**.
3. Tap  to call the patrol.

By Operating Keyboard Shortcut

1. Preview speed dome image. For detailed steps, see [**Preview by Operating Keyboard Shortcut**](#) and [**Preview by Operating Touchscreen**](#).
2. Press **SET** to start setting.
The SET button turns red.
3. Press **Num+PATROL** to select which patrol to set.

Preset

It determines the order at which the PTZ will follow while moving through the patrol.

Speed

It defines the speed at which the PTZ will move from one preset to the next.

Duration

It refers to the time span to stay at the preset.

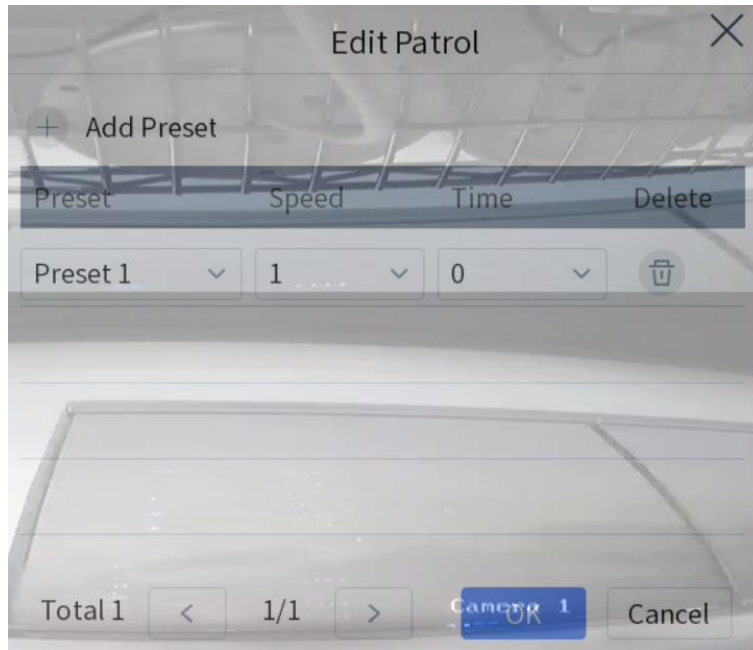


Figure 4-8 Edit Patrol

4. Press **Num+ENTER** to select preset.
5. Press **Num+ENTER** to set duration.
6. Press **Num+ENTER** to set speed.

Note

If you press **Num+PATROL** during steps 4 to 6, the settings will be cleared.

7. Repeat steps 4 to 6 to set more points of the patrol.
8. Press **SET** to finish setting.

Note

Press **Num+PATROL** again to clear all parameters set. Press **SET** to reset.

9. Press **Num+PATROL** to call the patrol.

Note





You can also tap  in **Local Live View** interface to select **Patrol**, set and call patrol.

Set and Call Pattern

Pattern records the movement of the PTZ. You can call the pattern to automatically move the PTZ according to the predefined path.

By Operating Touchscreen

1. Preview speed dome image. For detailed steps, see [***Preview by Operating Touchscreen***](#) and [***Preview by Operating Keyboard Shortcut***](#).

2. Set a pattern.
 - a. Tap .
 - b. Tap **Pattern**.
 - c. Tap  of a desired pattern.
 - d. Tap **OK**.
 - e. Rotate the joystick to control PTZ. The movement will be recorded.
 - f. Tap  to save the pattern.
3. Tap  to call the pattern.

By Operating Keyboard Shortcut

1. Preview speed dome image. For detailed steps, see [Preview by Operating Touchscreen](#) and [Preview by Operating Keyboard Shortcut](#).
2. Press **SET** to start setting.
The SET button turns red.
3. Press **Num+PATTERN** to select a pattern to set.
4. Rotate the joystick to control PTZ. The movement will be recorded.
5. Press **SET** to stop setting.
6. Press **Num+PATTERN** to call the pattern.

Note

You can also tap  in **Local Live View** interface to select **Pattern**, set and call pattern.

4.4 Video Wall


4.4.1 Video Wall Configuration

Configure Region

Divide a video wall into several regions to manage video wall by region.

Steps

1. Go to **Keyboard** → **Region**.

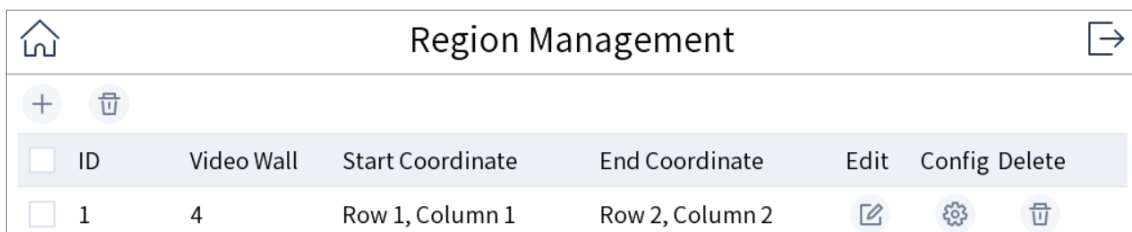




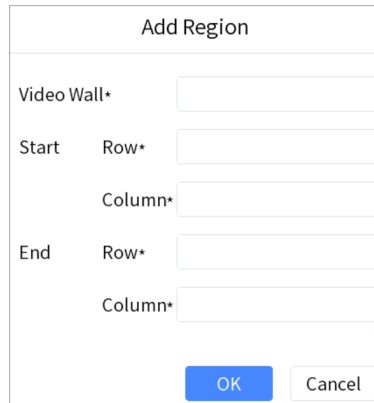
ID	Video Wall	Start Coordinate	End Coordinate	Edit	Config	Delete
1	4	Row 1, Column 1	Row 2, Column 2			

Figure 4-9 Region Management

2. Tap .



The 'Add Region' dialog box contains the following fields and buttons:

- Video Wall* [input field]
- Start Row* [input field]
- Column* [input field]
- End Row* [input field]
- Column* [input field]
- OK button
- Cancel button

Figure 4-10 Add Region

3. Enter video wall ID, start coordinate, and end coordinate.
4. Tap **OK**.

 **Note**

- Up to 16 regions can be added.
 - Region size cannot be larger than 6 × 8 (row × column).
-

Link Output Channel to Video Wall

Steps

1. Tap  of region to configure.

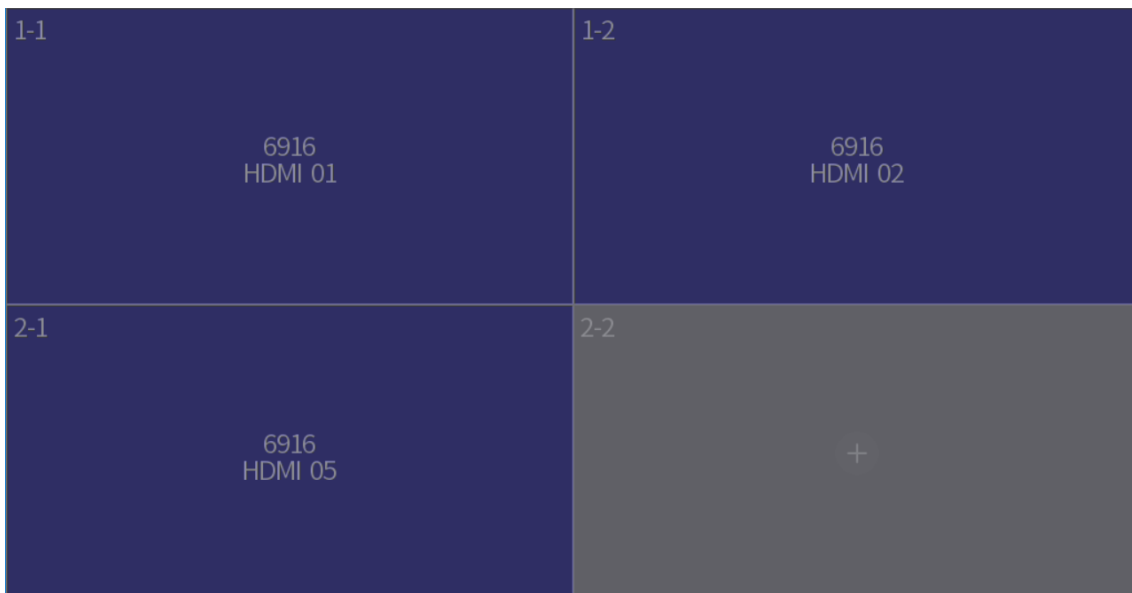



Figure 4-11 Region Configuration

2. Tap  of a grid.
3. Select a decoding device and select its output channel.

4. Tap **OK** to finish setting.

Note

Region output channel layout should be the same with the actual video wall.

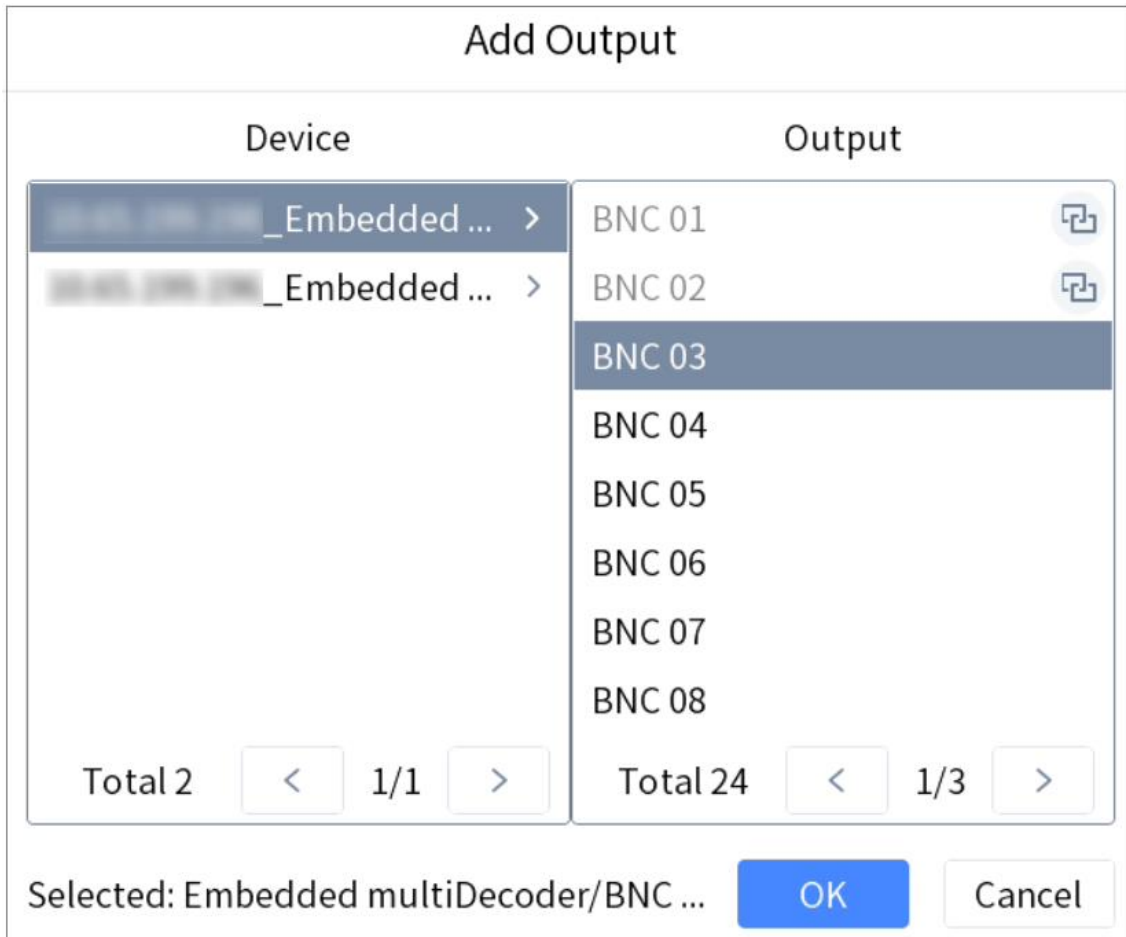


Figure 4-12 Add Output

4.4.2 Video Wall Control


Layout Operation

Select a monitor to open, close, resize, and divide windows.

Steps

1. Press **Num+REGION**, or press **Num+WALL**.
2. Tap to select a monitor.

3. Operate the window as desired.

Open window	Press Num+CAM or Num+CAM-G to display an input channel or camera group on the monitor.
Window roaming	Long press a window, and you can move it.
Close window	Long press a window, and tap  to close the window.
Resize window	<ul style="list-style-type: none">● Double tap a window to expand it to cover all the grids it overlays. Double tap the window again to restore it to the previous size.● Drag the four corners of the window to resize the window.
Divide window	Press Num+MON and press Num+MULT to divide the window.
Expand/restore sub-window	Press Num+MON , press Num+WIN to select a sub-window, and press F2 to expand the sub-window to cover the whole monitor. Press F2 again to restore the sub-window.

Window Operation

Display an input channel or camera group on a monitor.

Steps

1. Select a monitor to display. Three methods are provided. You are recommended to use the first one.
 - Press **Num+REGION** to show monitors on the region and video wall layout.
 - Press **Num+MON**. Or tap to select a monitor.
 - Press **Num+DEVICE**.

Note


You can check the device number in **Device Management** interface.

- Press **Num+WALL**. For roaming devices, WALL refers to video wall. For decoder, WALL refers to spliced screen.
-

Note

- For the roaming device supporting one video wall, always keyboard selects the number 1 video wall, whatever the Num is.
 - For B20, B21, C20N, C10S decoders (roaming device supporting multiple video walls, select the corresponding video wall.
 - For the device supporting spliced screen, select the corresponding joined screen.
-
- - Press **Num+MON**. Or tap to select a monitor. Press **Num+MON**: Select a monitor directly.
-


2. Select an input channel or camera group to preview.

- Press **Num+CAM** to preview the input channel.
- Press **Num+CAM-G** to preview the camera group.
- Tap  on the upper right corner of the touchscreen and select an input channel to preview.

3. During live view, you can switch live view input channel, capture images, and clip videos.

Switch Channels Press **PREV/NEXT** to switch to previous/next online input channel.


Capture Images Press the button on the top of joystick to capture a picture.

Clip Videos Press  to start clipping and press it again to stop clipping.

Scene Operation

You can switch the scene for a region or video wall.

Steps

1. Press **Num+REGION**, or press **Num+WALL**.
2. Select a monitor or window on touchscreen.
3. Select a scene as desired.
 - Tap  on the upper right corner and select a desired scene.

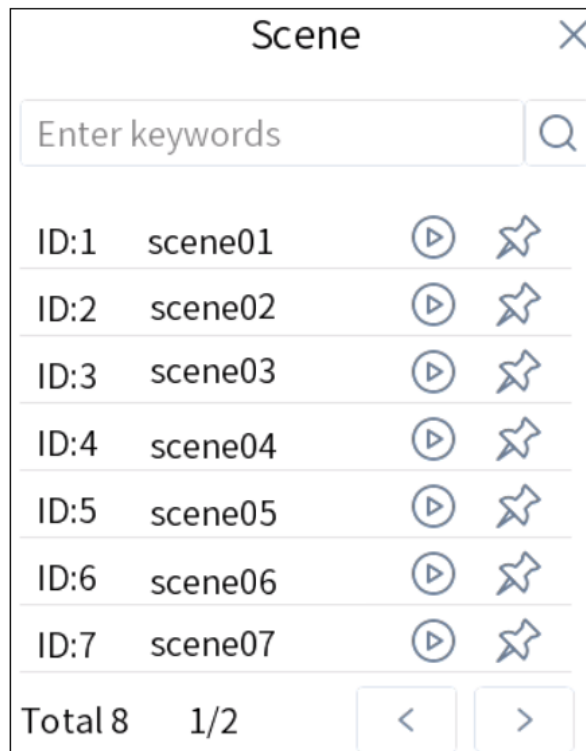





Figure 4-13 Scene

Table 4-2 Icon Description

Icon	Description
	Switch scene.
	Save scene. <hr/>  Note You can also press SET+Num+SCENE+SET to save scene. <hr/>

- Press **Num+SCENE** to switch scenes.

4.4.3 PTZ Control

You can control the added speed dome, like control PTZ movement, turn on/off light, turn on/off wiper, zoom in/out, increase/decrease focus, increase/decrease iris, set/call preset, patrol and pattern.


Steps

1. Display speed dome image on video wall. For detailed steps, see [Window Operation](#).
2. Control PTZ. For detailed steps, see [PTZ Control](#).

4.4.4 Group and Macro

You can execute a series of continuous actions in sequence by calling a macro or group. Steps of setting group and macro are the same, we take setting and calling macro as the example to describe the steps.

Steps

1. Go to **Keyboard** → **Macro**.
2. Tap .
3. Enter macro name.
4. Press keyboard buttons to enter commands.

Note

You can add up to 256 keys in one macro. A number may contain several keys, e.g., 369 contains 3 keys. A functional button is one key.

5. Tap **Save**.
6. Press **Num+MACRO** to call the macro.

4.5 Playback



4.5.1 Local Playback

Play videos on the touchscreen.

Instant Playback


Play videos in 3/5/10/15 minutes.

Steps

1. Start local live view. For detailed steps, see [Preview by Operating Touchscreen](#) and [Preview by Operating Keyboard Shortcut](#).
2. Press  to start playing the video within 5 minutes. Or tap , tap **Instant**, and select the playback time.

Playback by Time

Steps






1. Start local live view. For detailed steps, see [Preview by Operating Touchscreen](#) and [Preview by Operating Keyboard Shortcut](#).
2. Tap .
3. Tap **By Time**.
4. Select a day in calendar.

Playback Control

During playback, you can clip videos, capture images, control playback speed, etc.

Before the operation, you need to connect a USB flash drive or configure keyboard FTP settings. Clipped videos and captured pictures will be saved to USB flash drive or FTP server. For steps of storage configuration, see [Storage](#).

Table 4-3 Button Description

Button	Description	Button	Description
Time bar	Drag time bar to quickly locate on a certain time to play.		Pause/resume playback.
	Stop playback.		Jump backward for 30 seconds.
	During playback, press it to start clipping.		Jump forward for 30 seconds.

Button	Description	Button	Description
	Press it again to stop clipping.		
Outer shuttle	<ul style="list-style-type: none"> • Rotate it clockwise to speed up. • Rotate it anticlockwise to slow down. 	Inner shuttle	Reserved
Capture	Press the button on the top of joystick to capture the images.	-	-



4.5.2 Video Wall Playback

Play videos on video wall.

Instant Playback


Play videos in 3/5/10/15 minutes.

Steps

1. Start video wall live view. For detailed steps, see [Window Operation](#).
2. Press  to start playing the video within 5 minutes. Or tap , tap **Instant**, and select the playback time.

Playback by Time

Steps

1. Start video wall live view. For detailed steps, see [Window Operation](#).
2. Tap , tap **By Time**, and select a day in calendar.

Playback Control

For detailed steps, see [Playback Control](#).

Note


Capturing, clipping, recording, jumping forward or backward for 30 seconds are not supported in **Video Wall Playback**.

4.6 Channel Management

4.6.1 Edit Channel

We take editing input channel as the example to describe the steps.

Steps

1. Go to **Keyboard** → **Channel**.
2. Tap  of input channel/output channel to edit.

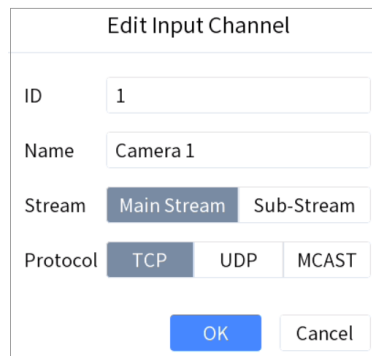


Figure 4-14 Edit Input Channel

3. Edit parameters.

ID

The unique identification for input channel. It is valid in local and video wall live view mode.

Stream

The stream to preview in local and video wall live view mode.

Protocol

It is valid for video wall preview.

4. Tap **OK**.

4.6.2 Output Channel

When adding decoders or video recorders, their output channels will be added and displayed in output channel list. You can press **Num+MON** to operate an output channel, and the number refers to output channel ID. Video wall also need to link to these output channels.

ID	Output Type	IP/Port	Region	Edit
1	BNC 01	192.168.1.1/8000	/	
2	BNC 02	192.168.1.2/8000	/	
3	BNC 03	192.168.1.3/8000	/	
4	BNC 04	192.168.1.4/8000	/	
5	BNC 05	192.168.1.5/8000	/	
6	BNC 06	192.168.1.6/8000	/	
7	BNC 07	192.168.1.7/8000	/	
8	BNC 08	192.168.1.8/8000	/	

Total 24 Page 1/3

Figure 4-15 Output Channel

4.6.3 Camera Group

Camera group enables you to preview a group of cameras (input channels) in sequence.

Steps

1. Go to **Keyboard** → **Channel** → **Camera Group**.

<input type="checkbox"/>	ID	CAM-G Name	Channels	Interval (s)	Edit	Link	Preview	Delete
<input type="checkbox"/>	1	1	5	10				
<input type="checkbox"/>	2	2	0	30				
<input type="checkbox"/>	3	123	0	30				

Figure 4-16 Camera Group

2. Tap .


Figure 4-17 Add Camera Group

3. Enter group name and interval.

Interval: The time to dwell in each input channel before switching to next channel.

4. Tap **OK**.

5. Add input channel to camera group.

- Select a channel and tap  on the right.
- Check input channels and tap  on the upper-right corner.










<input type="checkbox"/>	ID	Channel Name	Num	IP/Port	Stream	Protocol	Link
<input type="checkbox"/>	1	Camera 1	1	192.168.1.1/8000	Main Stream	TCP	
<input type="checkbox"/>	2	BNC 07	2	192.168.1.1/8000	Main Stream	TCP	
<input type="checkbox"/>	3	DECODER VGA 01	1	192.168.1.1/8000	Main Stream	TCP	
<input type="checkbox"/>	4	DECODER DVI 01	65	192.168.1.1/8000	Main Stream	TCP	
<input type="checkbox"/>	5	DECODER VGA 01	2	192.168.1.1/8000	Main Stream	TCP	
<input type="checkbox"/>	6	DECODER DVI 01	1	192.168.1.1/8000	Main Stream	TCP	
<input type="checkbox"/>	7	ipc_12_你好	33	192.168.1.1/8000	Main Stream	TCP	
<input type="checkbox"/>	8	IPdome	1	192.168.1.1/8000	Main Stream	TCP	

Figure 4-18 Link Channel

 **Note**

- Up to 16 camera groups can be added.
- Each camera group can link up to 64 input channels.
- Interval range: 10 to 65535 seconds.
- The camera groups set by different users are independent. Namely, users can only view and edit their own camera groups.


- Optional: Tap **Linked Channel**, check input channels to be unlinked and tap  to unlink the input channel.


4.7 User Management

Administrator can add operator and allocate devices to operator. Operator permissions are as follows:

- Add, edit, and delete macro and group.
- Add, edit, and delete region.
- Deleting, editing, and adding devices are not allowed.

Steps

- Go to **Keyboard** → **System** → **User**.
- Tap .
- Enter user name and password for an operator, and tap **OK**.

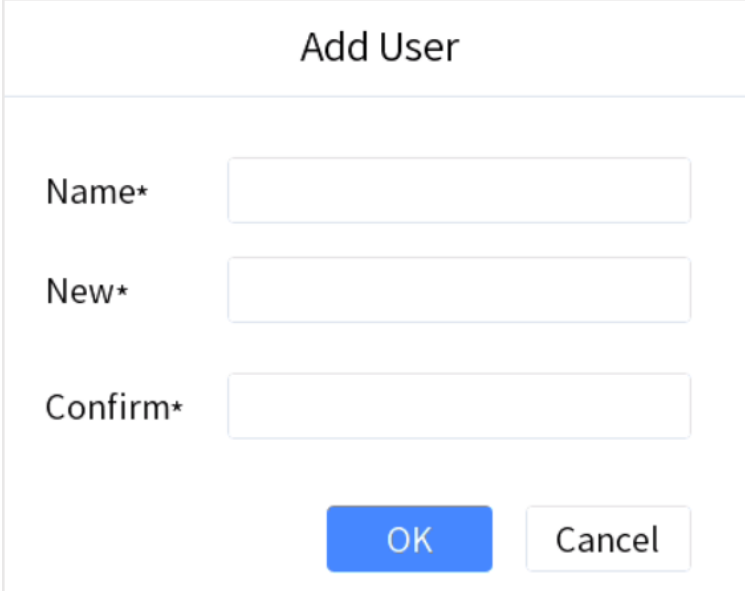


The screenshot shows a dialog box titled "Add User". It contains three text input fields, each with an asterisk indicating it is required: "Name*", "New*", and "Confirm*". Below the input fields are two buttons: a blue "OK" button and a white "Cancel" button with a grey border.

Figure 4-19 Add User

Caution


We highly recommend you create a strong password of your own choosing (Using a minimum of 8 characters, including at least three of the following categories: upper case letters, lower case letters, numbers, and special characters.) in order to increase the security of your product. And we recommend you reset your password regularly, especially in the high security system, resetting the password monthly or weekly can better protect your product.

- Allocate devices to operator.
 - Tap  of device to be linked.

– Check devices as desired and tap  on the upper-right corner.

 **Note**

- Keyboard supports up to 32 users: 1 administrator and 31 operators.
- The operator can only operate on the devices allocated.

5. Optional: Tap **Linked Device**, check the devices to be unlinked and tap  to unlink the devices.

4.8 Video Recorder

Control video recorder by operating video record remote panel.

4.8.1 Remote Panel

Press **Num+DEVICE** to show video recorder remote panel. Num refers to video recorder ID. Go to **Device** for video recorder ID.

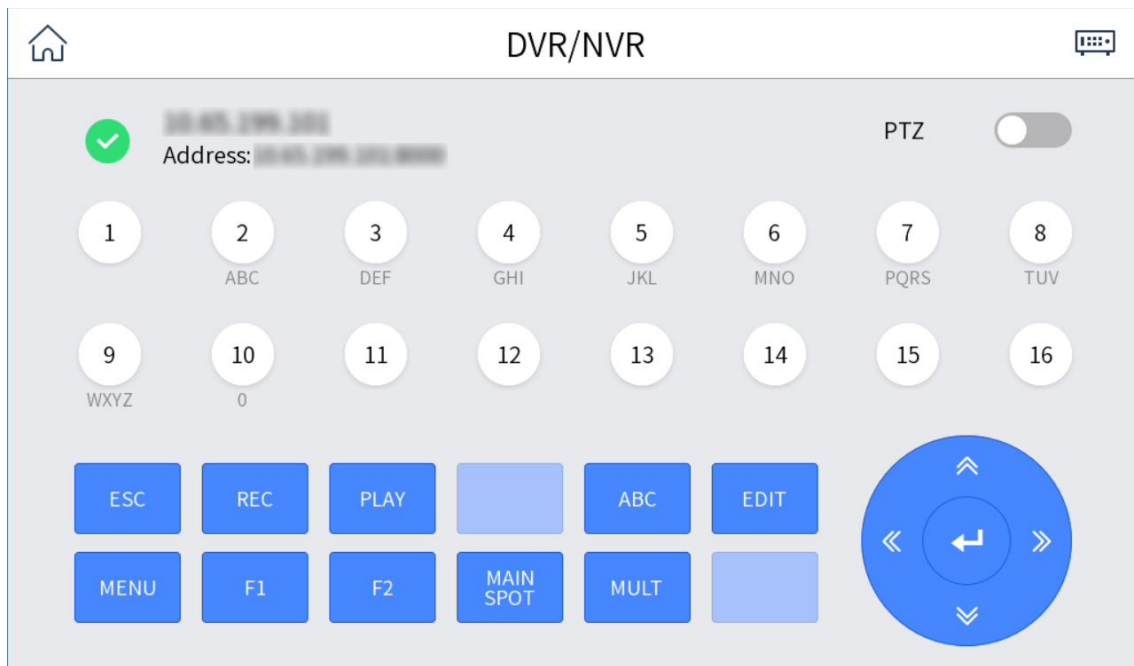






Figure 4-20 Remote Panel (Disable PTZ)

Table 4-4 Button Description

Button	Description
Disable PTZ	Exit PTZ control mode.
Numeric Key	<ul style="list-style-type: none"> • In editing mode, tap it to enter number 1 to 16. • In live view or PTZ mode, tap it to switch channel. • During playback, tap it to switch channel.

Button	Description
ESC	Exit the current menu.
REC	Start/stop manual recording.
PLAY	<ul style="list-style-type: none"> ● In live view mode, tap it to enter Instant Playback interface. ● During playback, tap it to select a day in the calendar.
ABC	In editing mode, tap it to switch input method among digits, letters, and characters.
EDIT	<ul style="list-style-type: none"> ● In editing mode, tap it to delete the content before the cursor. ● Check/uncheck a checkbox. ● In setting menu, tap it to enter editing mode.
MENU	<ul style="list-style-type: none"> ● Enter main menu interface. ● In second-level menu, tap it to go back to Live View interface. ● During playback, tap it to hide the control bar.
F1	<ul style="list-style-type: none"> ● During playback, tap it to switch between play and reverse play. ● In live view mode, tap it to start instant playback.
F2	<ul style="list-style-type: none"> ● Tap it to switch tab page. ● During playback, tap it to switch playback mode between playback by channel and playback by file. ● During simultaneous playback, tap it to switch channel.
MAIN/SPOT	Tap it to switch the output between main port and auxiliary port.
MULT	In live view mode, tap it to switch image division.
Directional Button	<ul style="list-style-type: none"> ● Move the active selection in a menu. Tap it to move the selection up and down. ● In live view mode, tap it to switch different channels. ● In playback mode: <ul style="list-style-type: none"> ○ Up (corresponds to  in playback menu): Tap it to speed up. ○ Down (corresponds to  in playback menu): Tap it to slow down. ○ Left (corresponds to  in playback menu): Tap it to switch to previous file/event/tag/day. ○ Right (corresponds to  in playback menu): Tap it to switch to next file/event/tag/day.

Button	Description
	<ul style="list-style-type: none"> •
Enter	<ul style="list-style-type: none"> • Confirm an operation. • Check a checkbox and switch ON/OFF. • During playback, tap it to stop/resume playback. • In single frame playback mode, tap it to play next frame.

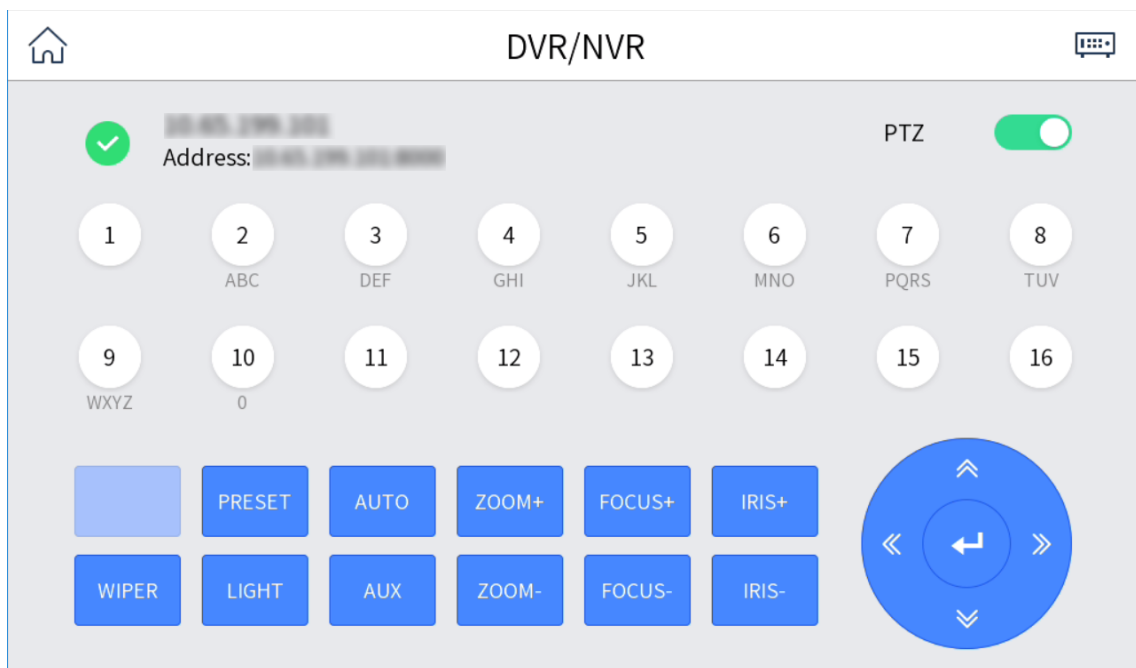


Figure 4-21 Remote Panel (Enable PTZ)

Table 4-5 Button Description

Button	Description
Enable PTZ	In PTZ live view mode, enable PTZ to enter PTZ control mode.
Numeric Button	Switch to the corresponding channel.
PRESET	Tap PRESET+Num to call the preset.
AUTO	Enter auto-scan mode.
ZOOM+	Zoom in.
FOCUS+	Increase focus.
IRIS+	Increase iris.

Button	Description
WIPER	Turn on/off PTZ wiper.
LIGHT	Turn on/off PTZ light.
AUX	Reserved.
ZOOM-	Zoom out.
FOCUS-	Decrease focus.
IRIS-	Decrease iris.
Directional Button	Control PTZ movement.
Enter	In auto-scan mode, tap it to stop/resume auto-scan.

4.8.2 Live View

Video Recorder (Version before 4.0)

Whatever interface the video recorder is in, tap **ESC** till you enter the live view mode.

Video Recorder (Version: 4.0 and above)

Whatever interface the video recorder is in, tap **directional button** to enter the live view mode.

4.8.3 PTZ Control

You can control the added speed dome, like control PTZ movement, turn on/off light, turn on/off wiper, increase/decrease iris, increase/decrease focus, zoom in/out, call preset. But setting preset, setting and calling pattern, and setting and calling patrol are not supported.

General Operation

Operate the joystick and buttons to control PTZ.

Call a Preset

Tap **PRESET+Num** to call the preset.

4.8.4 Playback

Video Recorder (Version before 4.0)

In live view mode, tap **PLAY**.

Video Recorder (Version 4.0 and above)

- In live view mode, tap **PLAY**.

- In other menu, tap directional button to navigate to playback menu.

4.9 Connect the Device Through Serial Ports

The network keyboard can be connected to the device through RS-232 and RS-485 serial port. After the connection, the keyboard can be used to control the video recorder, analog dome and analog matrix.

4.9.1 Connect Video Recorders

The keyboard can be connected to the video recorder through RS-485 serial port to realize preview, playback, PTZ control and other functions.

Steps

1. Connect the KB port of the video recorder with the RS-485 interface of the keyboard.

Note

T+ and T- of RS-485 interface correspond to D+ and D- of KB port respectively.

2. Enter **Serial Port Control**, and select **DVR/NVR**.
3. Select **Device Address**.
4. Select **Device Version**.

Note

- The device version is the firmware version of the corresponding device.
 - Please select according to the actual device version. Wrong version selection will cause some function exceptions.
-

5. Control video recorder through remote panel of video recorder. For details, see ***Remote Panel***.

Note

You can only control the video recorder through the joystick and touchscreen, and the shortcut of network keyboard cannot be used to control the video recorder.

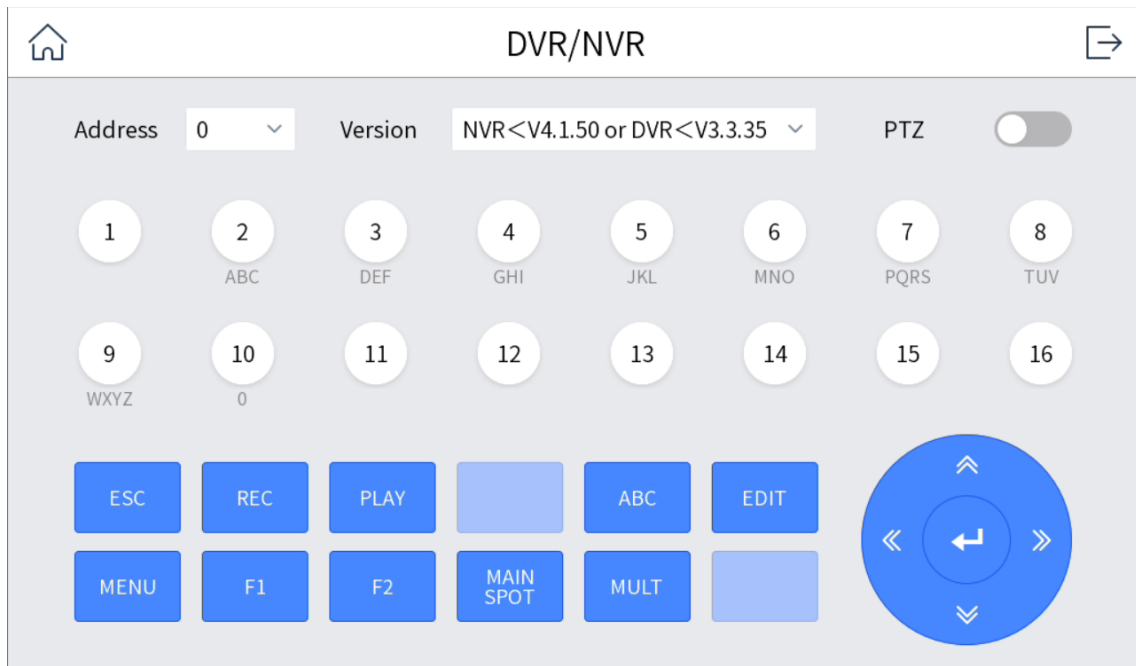


Figure 4-22 Connect Video Recorder (PTZ Disabled)

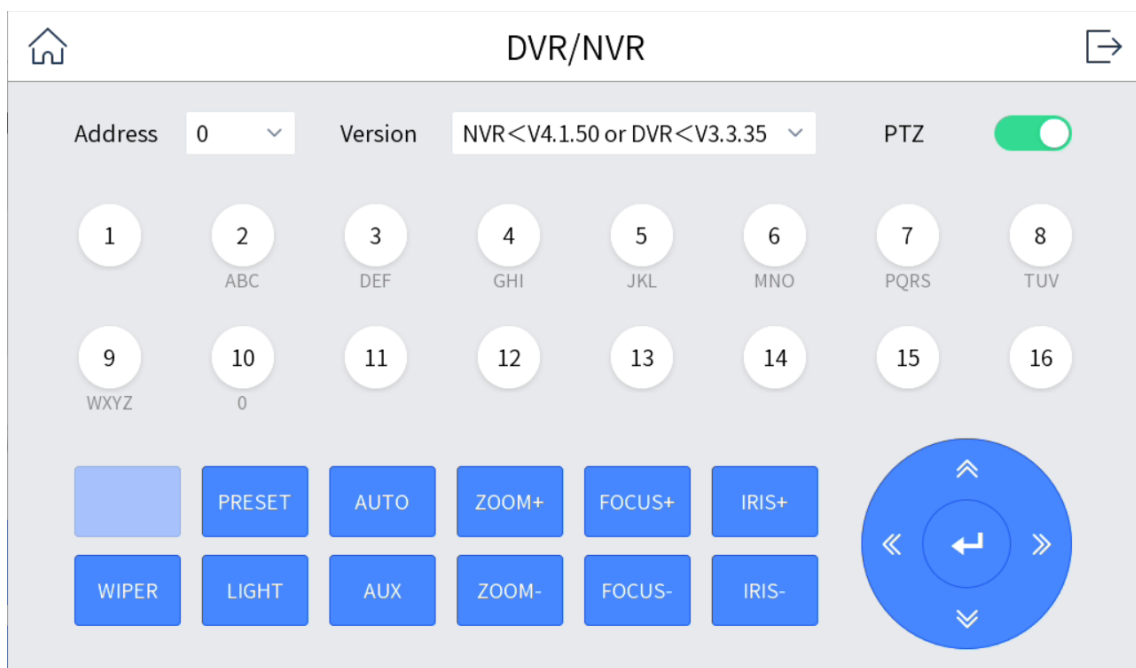



Figure 4-23 Connect Video Recorder (PTZ Enabled)

4.9.2 Connect Analog Matrix

The keyboard can be connected to the analog matrix through RS-232 serial port.

Steps

1. Connect the analog matrix to the RS-232 interface on the keyboard.
2. Enter **Serial Port Control**, select **Analog Dome/Analog Matrix**, and tap **OK**.
3. Tap  on the upper-right corner and select **RS232**.
4. Set the parameters of RS232 serial port.

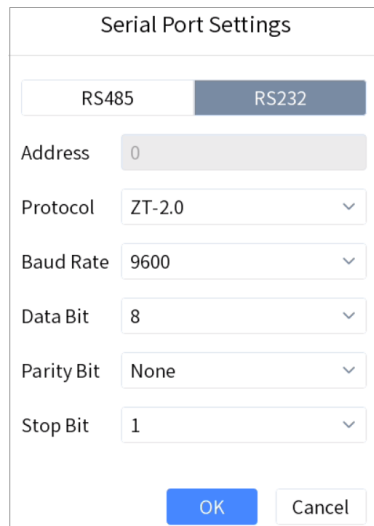



Figure 4-24 Setting Parameters of RS232 Serial Port


5. Optional: Switch one input port of the analog matrix to the output port.
 - 1) Part of the analog matrix needs to enter the device number in the keyboard.
 - 2) Press **1+MON**.
 - 3) Press **2+CAM** to switch the input port 2 to the output port 1.

4.9.3 Connect Analog Dome

The keyboard can be connected to the analog dome through RS-485 serial port to control PTZ control, set and call preset, call patrol and pattern, etc.

Steps

1. Connect the analog dome to RS-485 interface on the keyboard.
2. Tap **Serial Port Control**, select **Analog Dome/Analog Matrix** and tap **OK**.
3. Tap  on the upper-right corner and select **RS485**.
4. Set the parameters of RS485 serial port.

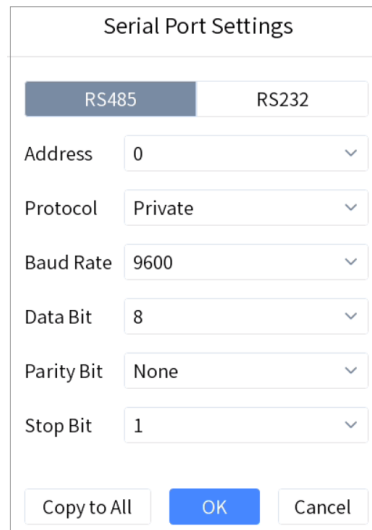

The image shows a 'Serial Port Settings' dialog box. At the top, there are two tabs: 'RS485' (which is selected and highlighted in blue) and 'RS232'. Below the tabs, there are several configuration fields, each with a dropdown arrow on the right:

- Address: 0
- Protocol: Private
- Baud Rate: 9600
- Data Bit: 8
- Parity Bit: None
- Stop Bit: 1

At the bottom of the dialog, there are three buttons: 'Copy to All', 'OK' (highlighted in blue), and 'Cancel'.

Figure 4-25 Setting Parameters of RS485 Serial Port

5. Press **NUM+CAM** and select analog dome.

 **Note**

One RS-485 serial port can be connected to multiple analog domes. The longer the serial port cable is, the fewer analog dome can be connected at the same time.

6. Control PTZ through the joystick.

 **Note**

- Setting and calling preset, and calling patrol and pattern are supported. For details, see [**PTZ Control**](#).
 - Calling and setting patrol are supported, and the specific number of analog domes supported varies with the protocol of the analog domes.
-

Chapter 5 iSecure Mode

5.1 Login

Steps

1. Tap **iSecure** at home page.

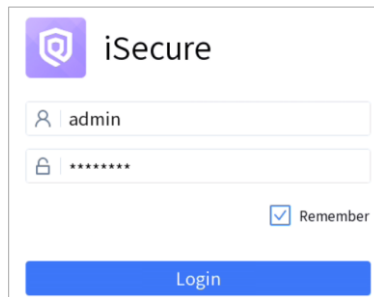
The image shows the iSecure login interface. At the top left is the iSecure logo, a purple shield with a white 'i'. To its right is the text 'iSecure'. Below the logo are two input fields: the first is for the username, containing 'admin', and the second is for the password, containing seven asterisks. To the right of the password field is a 'Remember' checkbox, which is checked. At the bottom of the form is a blue 'Login' button.

Figure 5-1 Log in to iSecure

2. Tap **Server IP** on the upper right corner.

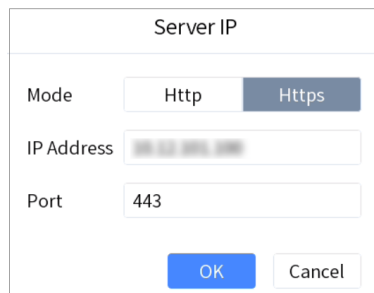
The image shows the 'Server IP' configuration dialog. The title is 'Server IP'. It has three sections: 'Mode' with two radio buttons, 'Http' and 'Https', where 'Https' is selected; 'IP Address' with a text input field containing '192.168.1.100'; and 'Port' with a text input field containing '443'. At the bottom are two buttons: 'OK' and 'Cancel'.

Figure 5-2 Server IP Configuration

3. Select **Http** or **Https** as the login mode.
4. Enter the IP address and port No. of the server, and tap **OK**.
5. Enter the user name and password of the server.
6. Optional: Check **Remember**.
7. Tap **Login**.

Note

- After several failed login attempts, you need to enter verification code. The details are subject to the actual interface.
- When you attempt to log into the platform for the first time, you will be prompted to log into the client first.
- If a platform is cascaded with other platforms, you can view all cameras and video walls of the platform and its cascading platforms when you log in to the platform through the

keyboard.

- Different users have different kinds of permissions. Please refer to the messages on the interface.

5.2 Resource List

Resource list interface appears after you log in to iSecure. Resource list contains control center, region, video wall, and camera. Tap a control center or region, you can view its subordinate control center, region, and camera.

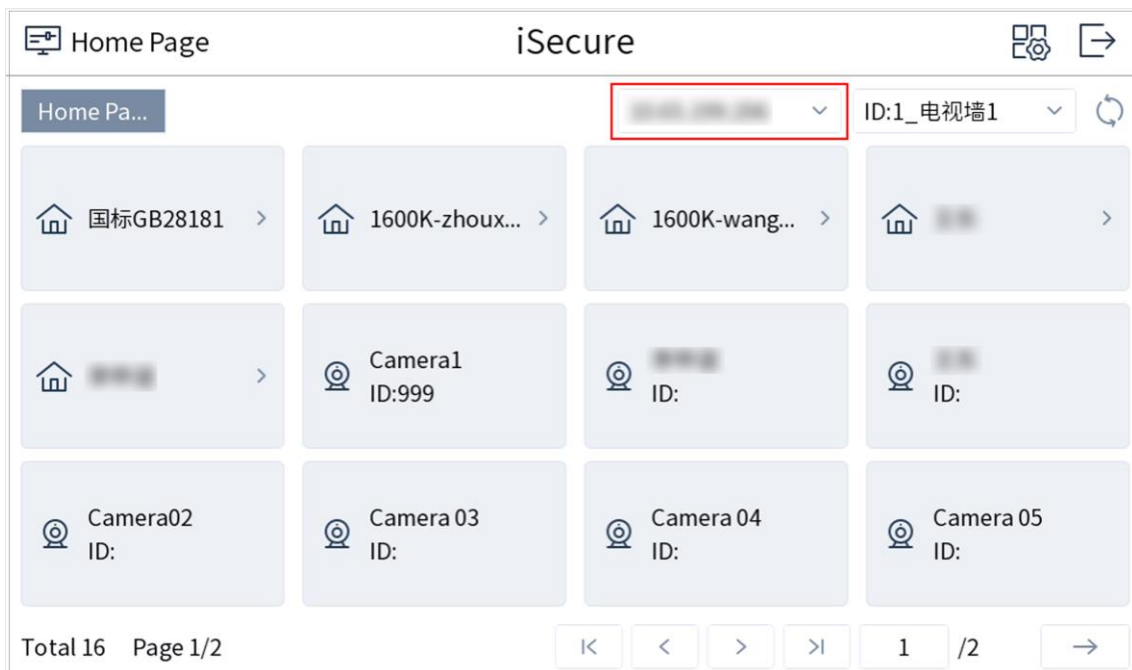


Figure 5-3 Resource List (iSecure)

- Tap the drop-down list on the upper right corner to view video wall ID and select a video wall. Tap the drop-down list in the red box to select TVMS server.
- Tap to select a control center or region to view its subordinate camera ID.
- The camera ID can be only edited in the platform client. For details, please refer to the user manual of the platform.


5.3 Local Live View

You can preview the cameras on iSecure platform on the touchscreen.

5.3.1 Enable Local Live View

Preview the images of cameras by operating keyboard shortcut.

Steps

1. Press **0+MON** to enter local live view.
2. Preview Operations.
 - Press **Num+CAM** to perform the preview operation.
 - Select  on the upper-right corner on the touchscreen, and select a channel under the node to display.
3. During preview, switch channels, capture images or clip videos.

- 4-Window Preview**
- Press **4+MULT** to switch the current image into 4 windows, and tap any window to preview more cameras.
 - Press **1+MULT** to return the previous image.

Switch Channels Press **PREV/NEXT** to switch to the previous or next channel.

Capture Images Press the top of the joystick to capture an image.

Clip Videos Press  to start clipping and press it again to stop clipping.

5.3.2 PTZ Operation

You can control the added speed dome, like control PTZ movement, turn on/off light, turn on/off wiper, zoom in/out, increase/decrease iris, increase/decrease focus, set and call preset, call patrol/pattern.



For detailed steps, see [PTZ Control](#).


5.4 Video Wall Operation

5.4.1 Region Configuration

The whole video wall can be divided into different regions.

Steps

1. Tap  on the upper-right corner.
2. Tap .

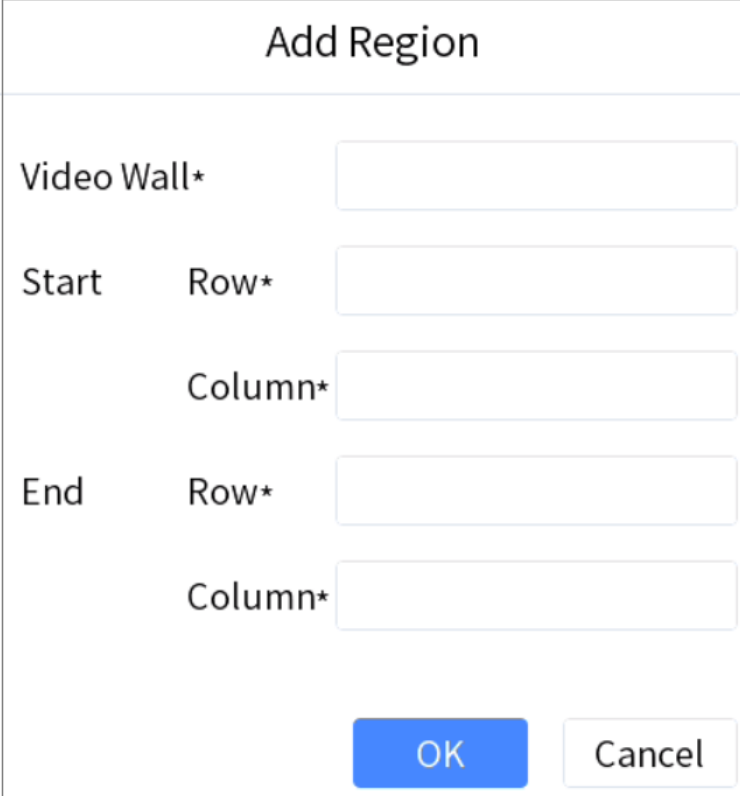

Add Region

Video Wall*

Start Row*

Column*

End Row*

Column*

Figure 5-4 Add Region

3. Enter video wall ID, start and end coordinates.
4. Tap **OK**.

 **Note**

- Up to 16 regions are supported.
 - The maximum region specification is 6 × 8.
 - If you do not configure the region, region 1 corresponds to video wall 1, region 2 corresponds to video wall 2, region 16 corresponds to video wall 16 by default.
-

5.4.2 Video Wall Control

- Select a coordinate grid that has been linked with an output interface, and perform operations such as opening a window, closing a window, resizing a window, and dividing a window.
- Select a video wall to switch scenes and display the current layout.
- Switch the designated camera to the designated monitor or sub-window of the video wall.
- Do not support camera group.

For detailed steps, see [**Video Wall Control**](#).

5.4.3 PTZ Operation


You can control the added speed dome, like control PTZ movement, turn on/off light, turn on/off wiper, zoom in/out, increase/decrease iris, increase/decrease focus, set and call preset, call patrol/pattern.

For detailed steps, see [PTZ Control](#).

5.5 Video Wall Playback

On the keyboard video wall, you can play back video files from cameras on iSecure platform.

Note

- You can play back video files from the central or local cameras by choosing **Central Storage** or **Local Storage** after tapping . Some operations in the process of playback are not supported. Please follow the interface prompt messages.
 - Only playback from VNSC components of the platform through standard RTSP is supported.
 - The progress bar will be displayed during playback. You can drag the progress bar back and forth to view the playback image.
-

Method 1

1. Press **Num+REGION** to select a region, or press **Num+WALL** to select a wall.
2. Tap to select a window to start playback. For detailed steps, see [Video Wall Playback](#).

Method 2

3. Select a wall in the wall list.
4. Press **Num+MON**.
5. Select a channel with records to start playback.

Chapter 6 HikCentral Mode

The keyboard is accessible to HikCentral platform, and the images of the cameras accessible to HikCentral platform can be displayed on the video wall and previewed locally.

6.1 Login

Steps

1. Tap **HikCentral** at home page.

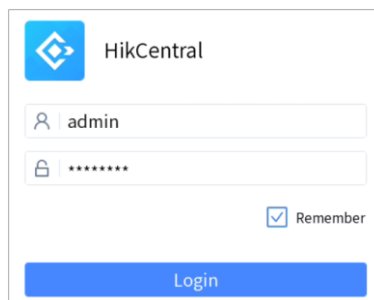


Figure 6-1 HikCentral Login

2. Tap **Server IP** on the upper right corner.

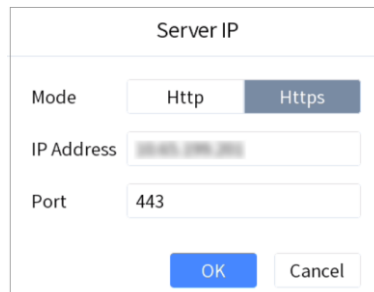


Figure 6-2 Configure Server IP (HikCentral)

3. Select **Http** or **Https** as the login mode.
4. Enter server IP address and port, and tap **OK**.
5. Enter server user name and password.
6. Optional: check **Remember**.
7. Tap **Login**.

Note

After several failed login attempts, you need to enter verification code. The login attempt times are decided by platform.

6.2 Resource List

Resource list interface appears after you log into HikCentral platform. Resource list contains control center, region, video wall, and camera. Tap a control center or region, and you can view its subordinate control center, region, and camera.

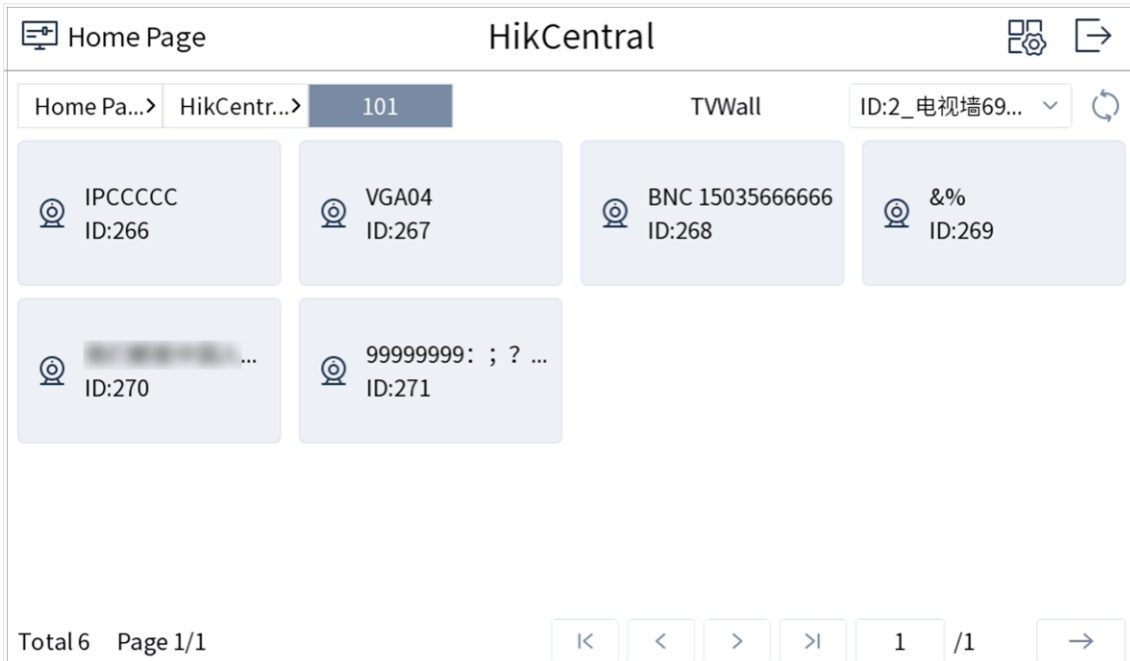



Figure 6-3 Resource List (HikCentral)

- Tap the dropdown list on the upper right corner to view video wall ID and select a video wall.
- Tap  on the upper right corner to divide the whole video wall into regions.
- Select a site, and tap to select a control center or region to view its subordinate camera ID.
- The camera ID can be only edited in the platform client.


6.3 Local Live View

You can preview the cameras on HikCentral platform on the touchscreen.

6.3.1 Enable Local Live View

Preview the images of cameras by operating keyboard shortcut.

Steps

1. Press **0+MON** to enter local live view.
2. Preview Operations.
 - Press **NUM+CAM** to perform the preview operation.
 - Select  on the upper-right corner on the touchscreen, and select a channel under the node to preview.

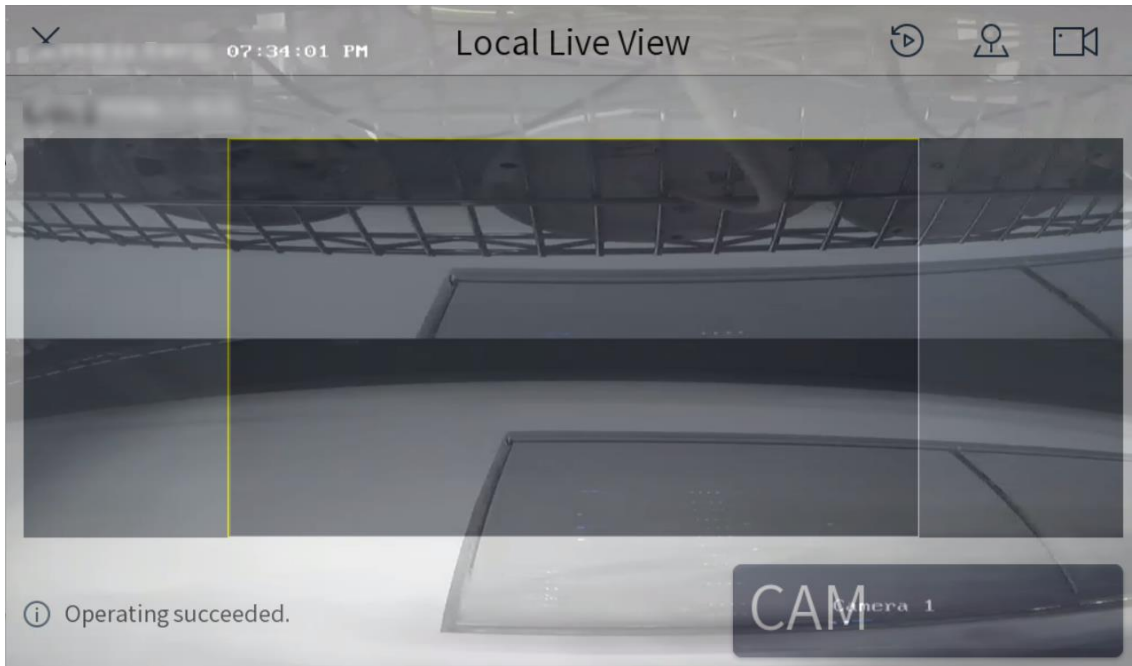



Figure 6-4 Local Live View

3. During preview, use the joystick to control the pattern of PTZ.
4. During preview, switch channels, capture images or clip videos.

- 4-Window Preview**
- Press **4+MULT** to switch the current image into 4 windows, and tap any window to preview more cameras.
 - Press **1+MULT** to return the previous image.

Switch Channels Press **PREV/NEXT** to switch to the previous or next channel.

Capture Images Press the top of the joystick to capture an image.

Clip Videos Press  to start clipping and press it again to stop clipping.

 **Note**

In HikCentral interface, press **Num+CAM** to control PTZ without previewing the images from speed domes.

6.3.2 PTZ Operation

You can control the added speed dome, like control PTZ movement, turn on/off light, turn on/off wiper, zoom in/out, increase/decrease iris, increase/decrease focus, set and call preset, call patrol/pattern.



For detailed steps, see [PTZ Control](#).


6.4 Video Wall Operation

6.4.1 Region Configuration

The whole video wall can be divided into different regions for management.

Steps

1. Tap  on the upper-right corner.
2. Tap .

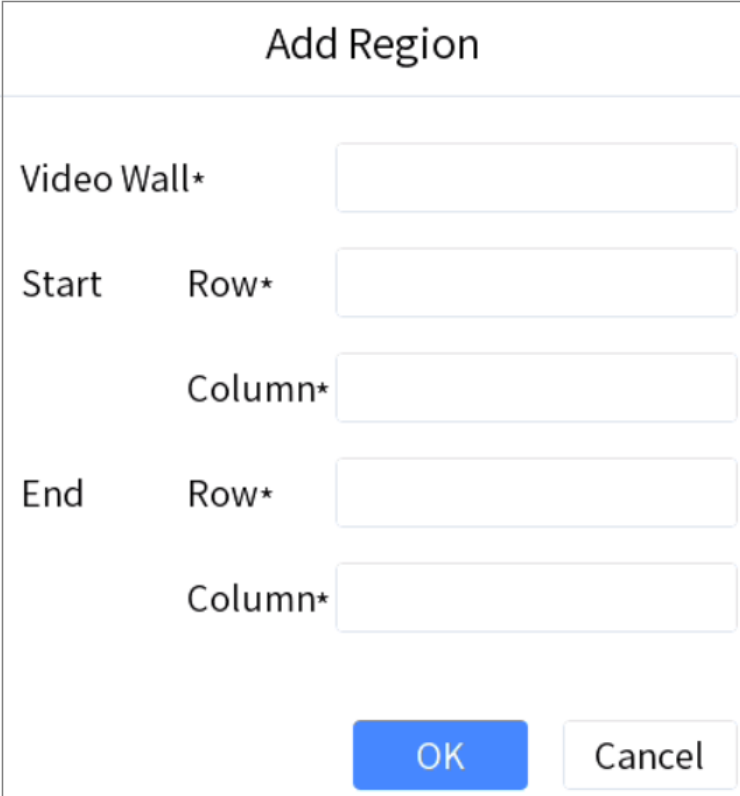

The screenshot shows a dialog box titled "Add Region". It contains the following fields and buttons:

- Video Wall***: A text input field.
- Start**:
 - Row***: A text input field.
 - Column***: A text input field.
- End**:
 - Row***: A text input field.
 - Column***: A text input field.
- OK**: A blue button.
- Cancel**: A white button with a grey border.

Figure 6-5 Add Region

3. Enter video wall ID, start and end coordinates.
4. Tap **OK**.

Note

- Up to 16 regions are supported.
 - The maximum region specification is 6 × 8.
 - If you do not configure the region, region 1 corresponds to video wall 1, region 2 corresponds to video wall 2, and region 16 corresponds to video wall 16 by default.
-

6.4.2 Video Wall Control

- When you press **Num+CAM** to preview, the stream type adapts to the platform by default. But you can switch the stream type.
- Select a coordinate grid that has been linked with an output interface, and perform operations such as opening a window, closing a window, resizing a window, and dividing a window.
- For LED video walls, you can open a window or batch open windows by tapping icons on the upper right corner.
- Select a video wall to switch scenes and display the current layout.
- Switch the specified camera to the specified monitor or sub-window of the video wall.
- Do not support camera group.

For detailed steps, see [**Video Wall Control**](#).

6.4.3 PTZ Operation

You can control the added speed dome, like control PTZ movement, turn on/off light, turn on/off wiper, zoom in/out, increase/decrease iris, increase/decrease focus, set and call preset, call patrol/pattern.

For detailed steps, see [**PTZ Control**](#).

6.5 Video Wall Playback

On the keyboard video wall, you can play back video files from cameras on HikCentral platform.

Note

- Local storage and device storage are supported.
 - Fast playback, slow playback, and pause/resume playback are supported. The progress bar will be displayed during playback. You can drag the progress bar back and forth to view the playback screen.
-

Method 1

1. Press **Num+REGION** to select a region, or press **Num+WALL** to select a wall.
2. Tap to select a window to start playback. For detailed steps, see [**Video Wall Playback**](#).

Method 2

1. Select a wall in the wall list.
2. Press **Num+MON**.
3. Select a channel with records to start playback.

Chapter 7 System

Tap **System** at home page to enter system interface. You can configure keyboard network, hardware, time, etc.

Note


Restoring default settings, importing/exporting configuration files, and remote upgrades require the administrator password to be verified.

7.1 Language

Select **System** → **Maintenance** → **Language** to view the language.

7.2 Hardware

Go to **System** → **Hardware**, and set the following parameters.

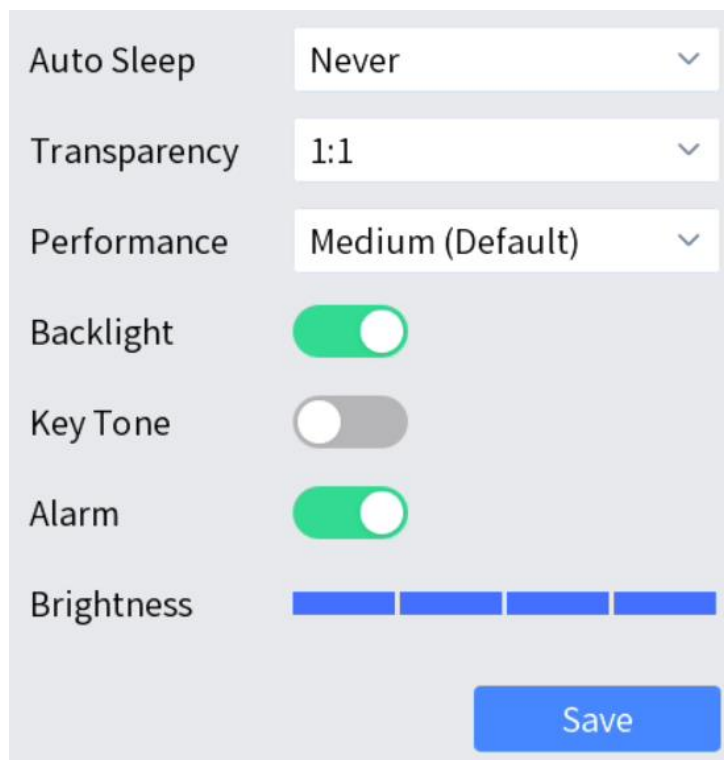

Auto Sleep	Never	▼
Transparency	1:1	▼
Performance	Medium (Default)	▼
Backlight	<input checked="" type="checkbox"/>	
Key Tone	<input type="checkbox"/>	
Alarm	<input checked="" type="checkbox"/>	
Brightness	<input type="range"/>	
<input type="button" value="Save"/>		

Figure 7-1 Hardware Parameters

Transparency

Select menu transparency. Available only in local live view.

Performance

You can select minimum delay, medium(default) or default according to the actual network.

Alarm

Keyboard alarms when network disconnected or IP conflicted.

7.3 Storage

7.3.1 FTP Storage


Captured images and clipped videos will be saved to FTP server. And when you upgrade keyboard via FTP server, the upgrade file from FTP server will be uploaded to the keyboard.

Before You Start

Build a FTP server.

Steps

1. Go to **System** → **Storage** → **FTP**.

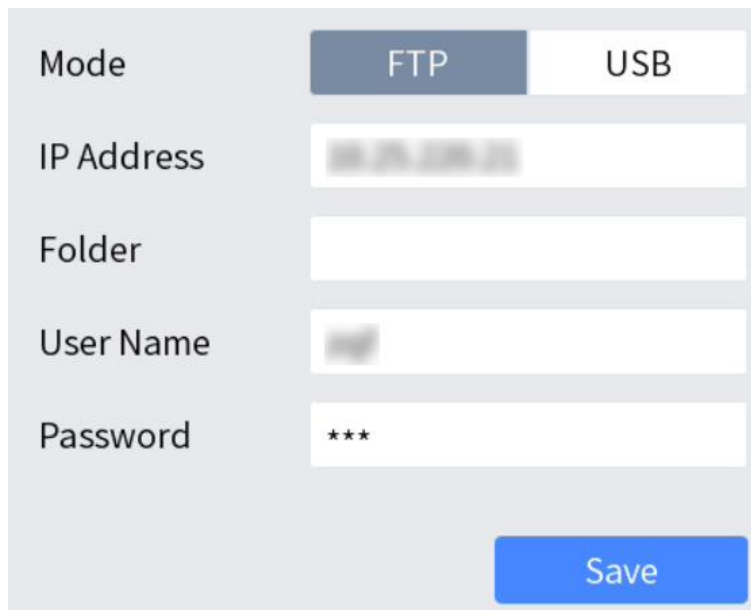

The screenshot displays a configuration window for FTP storage. At the top, there are two tabs: 'FTP' (which is selected and highlighted in blue) and 'USB'. Below the tabs are five input fields: 'IP Address' (with a blurred value), 'Folder' (empty), 'User Name' (with a blurred value), and 'Password' (with three asterisks). A blue 'Save' button is located at the bottom right of the form.

Figure 7-2 FTP Storage

2. Configure FTP server information.

- **IP Address:** IP address of FTP server.
- **Folder:** The folder name to be created in FTP server.
- **User Name and Password:** User name and password of FTP server.

 **Note**

The following special characters are not allowed: / \ : * ? ' " < > | %.

3. Tap **Save**.

7.3.2 USB Storage

Save captured images and clipped videos in USB flash drive.

Steps

1. Go to **System** → **Storage** → **USB**.
2. Tap **Save**.

7.4 Upgrade

You are recommended to upgrade your keyboard under the help of professional technical support. Export configuration file of the keyboard before upgrade. For detailed steps, see [**Import/Export Configuration File**](#).

7.4.1 FTP Upgrade

Steps

1. Configure FTP server. For detailed steps, see [**Storage**](#).
2. Turn on FTP server and input upgrade file into FTP root folder.
3. Go to **System** → **Maintenance** and select FTP upgrade.
4. Enter admin password to confirm.

7.4.2 USB Flash Drive Upgrade

Steps

1. Save upgrade file in USB flash drive.
2. Connect USB flash drive to keyboard USB interface.
3. Go to **System** → **Maintenance** and select USB Flash Drive upgrade.
4. Enter admin password to confirm.

7.5 Import/Export Configuration File

You can export the configuration file to the computer or import the configuration file from the computer to the keyboard. In case of keyboard failure, you need to back up the data by exporting the configuration file first, and then repair the failure. When you need to copy the data of this

keyboard to another keyboard, you can also import/export the configuration file.

Steps

1. Go to **System** → **Maintenance**.
2. Import/export configuration file.
 - Import Configuration File:
 - Tap **Import**.
 - Enter admin password.
 - Select the database file (kbConfig) to import.
 - Export Configuration File:
 - Tap **Export**.
 - Enter admin password.
 - Select the folder to export configuration file (kbConfig).

7.6 Factory Default

Restore keyboard to factory default settings.

Go to **System** → **Maintenance**.

- **Simple**: Restore all parameters, except the network (including IP address, subnet mask, gateway, MTU, NIC working mode, default route, server port, etc.) and user account parameters, to the factory default settings.
- **Complete**: Restore all settings to factory default settings.

7.7 Auxiliary Key

You can set F1 or F2 as **Two-way Audio** or **Enlarge/Restore Sub-Window**.

7.8 Lock Keyboard

Steps

1. Hold **LOCK** for 3 seconds to exit to home page and lock keyboard.
2. Press **LOCK** again to unlock keyboard.

Chapter 8 Web Configuration

You can add devices, manage channels or configure basic parameters through the web interface of the network keyboard. It is convenient to remotely configure and maintain the network keyboard.

8.1 Login

Before You Start

Ensure that the network keyboard is connected to the network and the IP address of the network keyboard is obtained.

Steps

1. Open the browser, enter the IP address of the network keyboard (HTTPS://IP address) in the address bar, and enter the login interface.



Figure 8-1 Login

2. Enter user name and password.
3. Click **Login**.

8.2 Add Devices

8.2.1 Manually Add

When the network keyboard is used as the control center and you select the keyboard operation mode, add the device first according to this section.

Steps

1. In **Device Management** interface, select to add **Center Device** or **IPC/Network Dome**.


2. Click **Add**, select to add devices by IP address or IP segment, and enter **IP Address**, **Port**, **User Name** and **Password**, and select protocol type.

The screenshot shows a dialog box titled "Add Device" with a close button (X) in the top right corner. The dialog contains the following fields and controls:

- Adding Mode:** Two radio buttons are present. The first is labeled "IP" and is selected (indicated by a filled circle). The second is labeled "IP Segment" and is unselected (indicated by an empty circle).
- Device Name:** A text input field.
- IP Address:** A text input field.
- Port:** A text input field.
- User Name:** A text input field.
- Password:** A text input field.
- Protocol:** A dropdown menu with "Default" selected and a downward arrow on the right.
- Verification Code:** A text input field.

At the bottom right of the dialog, there are two buttons: "OK" and "Cancel".

Figure 8-2 Add Device by IP Address

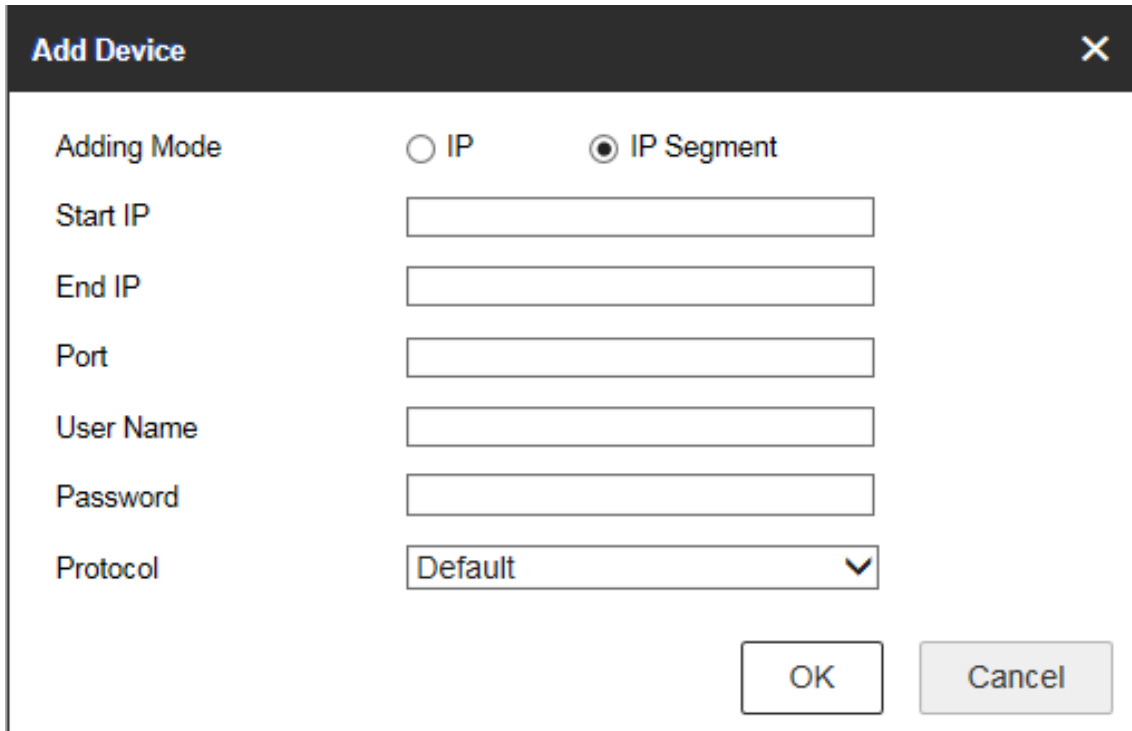

Add Device [X]

Adding Mode IP IP Segment

Start IP

End IP

Port

User Name

Password

Protocol ▾

OK Cancel

Figure 8-3 Add Device by IP Segment

 **Note**

- It takes a long time to add devices by IP segment. Please wait patiently.
- After adding devices in IP segment mode, you need to refresh manually to get the added devices.

-
3. If you enable stream encryption for the device, you need to enter the verification code when adding the device by IP address.
 4. Check or uncheck **Add Video Recorder Output** as desired.

 **Note**

Check **Add Video Recorder Output**, and the output port type, channel number and other information will be listed in the output port list.

-
5. Optional: In **Device Management** interface, click **Add SADP**, enter user name and password, check the device to be added, and click **OK** to add online devices on the same network segment.

Add SADP
✕

User Name

Password

<input type="checkbox"/>	ID	Device Type	IP Address	Port No.
<input type="checkbox"/>	1	DS-9664N-I16	192.168.1.1	8000
<input type="checkbox"/>	2	DS-19D2000-S	192.168.1.2	8000
<input type="checkbox"/>	3	DS-19D08-1604JN	192.168.1.3	8000
<input type="checkbox"/>	4	DS-2DF5294-A	192.168.1.4	8000
<input type="checkbox"/>	5	DTM-TY-1000	192.168.1.5	8000

Figure 8-4 Add SADP

 **Note**

- SADP search can only add devices in the same network segment.
- After adding devices in batches by SADP, you need to refresh manually to get the added devices.


8.2.2 Import Input Channels in Batches

Before You Start

1. Add several devices manually. Go to **Channel Management** → **Input Channel**, click **Export**, enter password, and then export channel information.
2. Edit the device channel information based on the exported template, and save the exported channel information into the local PC.

Steps

1. Go to **Channel Management** → **Input Channel**.
2. Click **Import**.

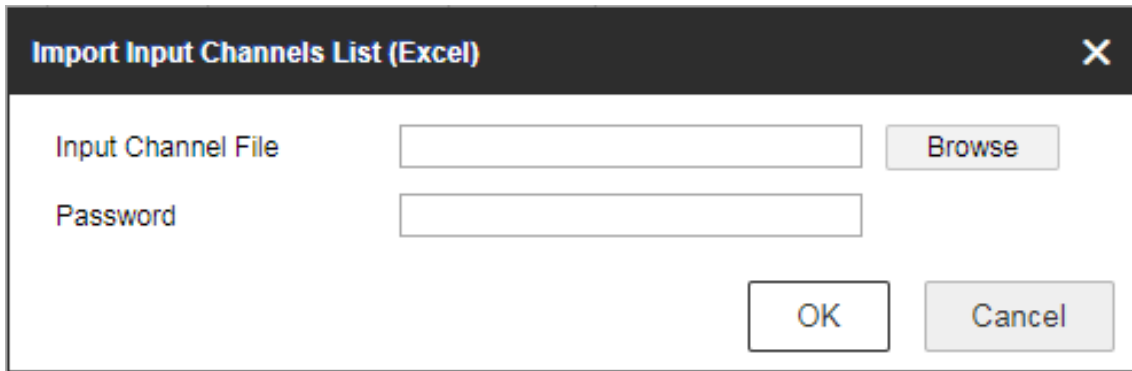

The dialog box titled "Import Input Channels List (Excel)" contains the following elements:

- Input Channel File:** A text input field with a "Browse" button to its right.
- Password:** A text input field.
- Buttons:** "OK" and "Cancel" buttons located at the bottom right of the dialog.

Figure 8-5 Import Input Channel in Batches

3. Click **Browse** and select the imported template.
4. Enter password and click **OK**.

The channels in the template will be added into network keyboards.

8.3 Channel Management

8.3.1 Edit Channel


Steps

1. Go to **Channel Management** → **Input Channel**.

Note

Input and output channels can be edited. This section takes input channels as an example.

2. Select the input channel to be edited and click **Edit**.

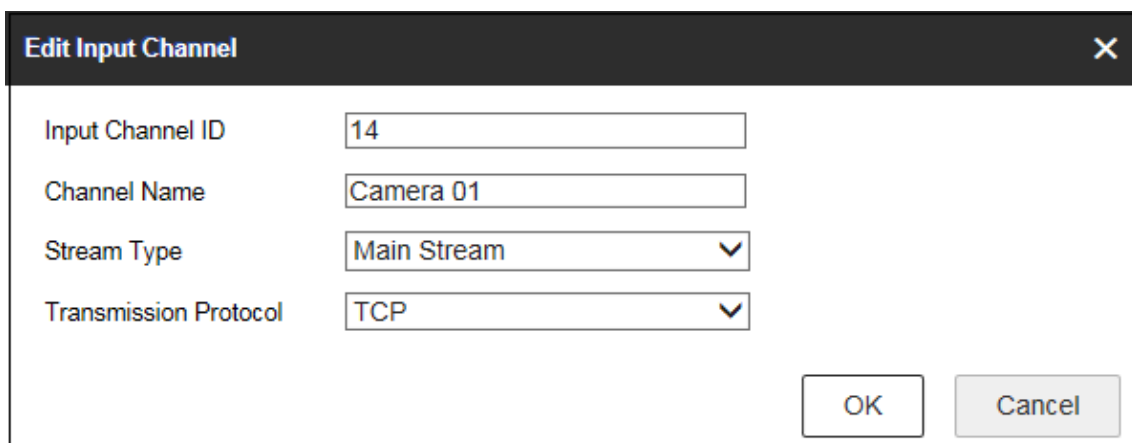

The dialog box titled "Edit Input Channel" contains the following elements:

- Input Channel ID:** Text input field containing "14".
- Channel Name:** Text input field containing "Camera 01".
- Stream Type:** Dropdown menu with "Main Stream" selected.
- Transmission Protocol:** Dropdown menu with "TCP" selected.
- Buttons:** "OK" and "Cancel" buttons at the bottom right.

Figure 8-6 Edit Input Channel

3. Edit channel parameters.

Input Channel ID

Each input channel corresponds to a unique number, which is valid for video wall and local live view.

Stream Type

Code stream for local live view and video wall preview.

Transmission Protocol

Available for video wall preview.

4. Click **OK**.

8.3.2 Camera Group

Camera group enables you to preview a group of cameras (input channels) in sequence.

Steps

1. Go to **Channel Management** → **Camera Group**.
2. Click **Add**.

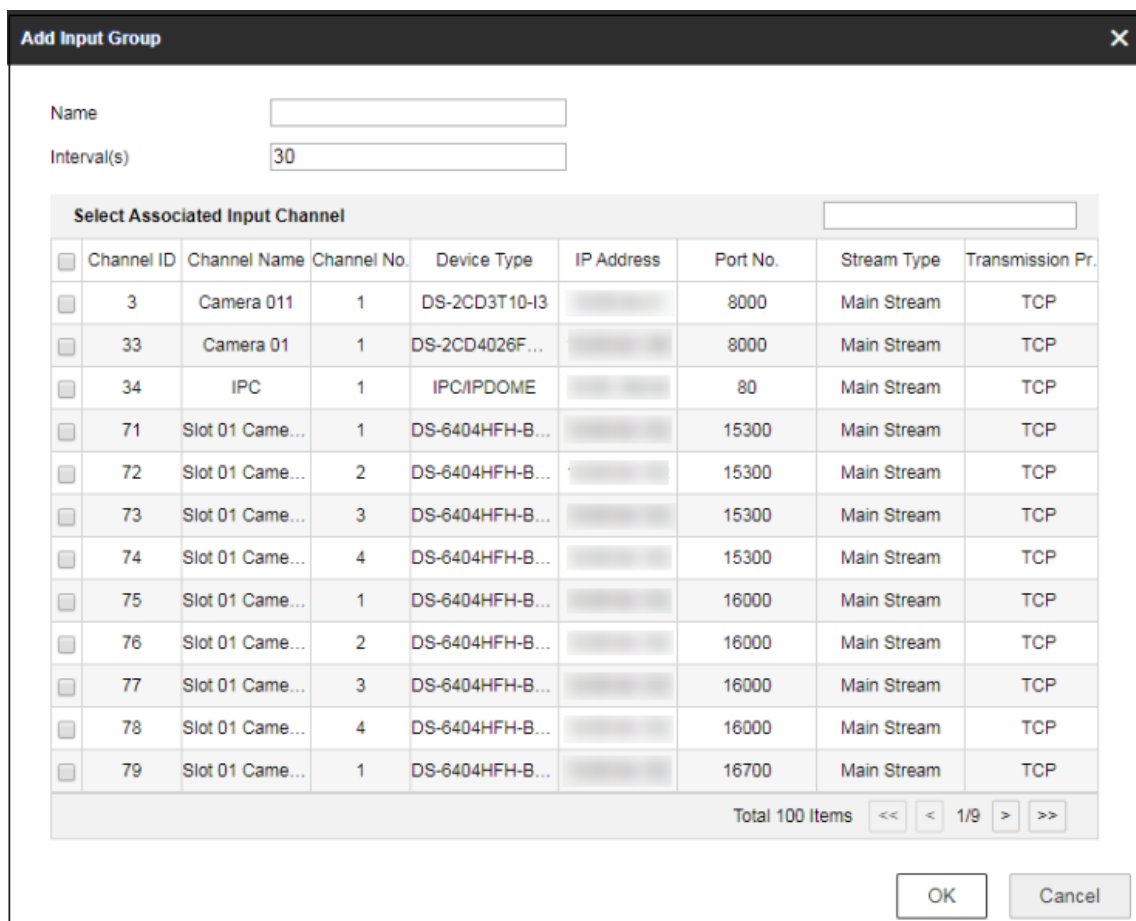


Figure 8-7 Add Camera Group

3. Enter **Name** and **Interval(s)**.

4. Check input channels to be linked and click **OK**.

 **Note**


- Up to 16 camera groups can be added.
 - Each camera group can link up to 64 input channels.
 - Interval range: 10 to 65535 seconds.
 - The camera groups set by different users are independent. Namely, users can only view and edit their own camera groups.
-

5. Click **Edit** in **Camera Group** interface, uncheck input channels to be unlinked and click **OK** to unlink the input channel.

8.4 Serial Port Settings

RS-485 and RS-232 serial port parameters can be set in the **Serial Port Settings** interface. You can set baud rate, data bit, protocol type, stop bit, parity and other parameters of RS232 and RS485, edit the address of RS485 serial port, and copy RS485 serial port settings to all.

- Configure the parameters of RS-485 port when the serial port is connected to analog dome.
- Configure the parameters of RS-232 port when the serial port is connected to the analog matrix.

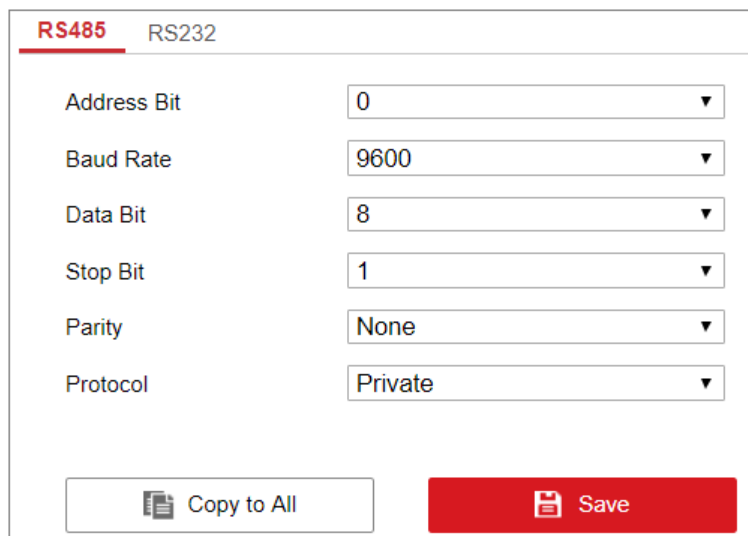

	RS485	RS232
Address Bit	0	
Baud Rate	9600	
Data Bit	8	
Stop Bit	1	
Parity	None	
Protocol	Private	



 

Figure 8-8 RS485 Serial Port Settings

RS485 **RS232**

Baud Rate: 9600 ▼

Data Bit: 8 ▼

Stop Bit: 1 ▼

Parity: None ▼

Protocol: ZT-2.0 ▼


 Save

Figure 8-9 RS232 Serial Port Settings

8.5 Network

Steps

1. Select **Network Management** at the main interface.
2. Configure network parameters.
 - Check **DHCP** to obtain IP address and related network parameters automatically.
 - Uncheck **DHCP** and enter IP address, gateway, subnet mask.
3. Click **Save**.

IP Address Settings

DHCP Enable

IP Address:

Gateway:

Subnet Mask:

Mac Address:


 Save

Figure 8-10 Network Parameters

8.6 System Settings

8.6.1 Version

Go to **System Management** → **Version** to view system version information, including device type, serial No., firmware version, decoding version, MCU version and web version.

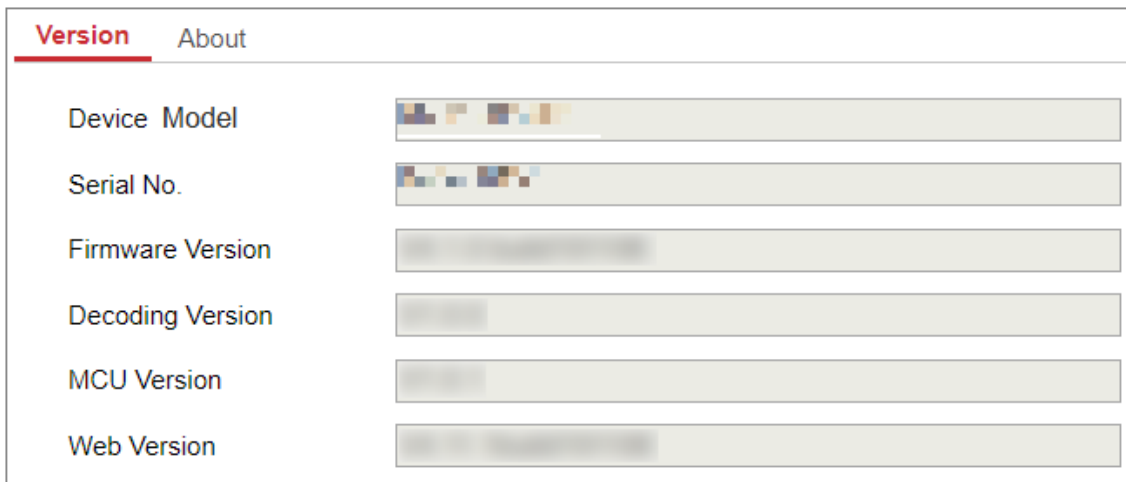


Figure 8-11 Version Information

8.6.2 User Management

Administrator can add operator and allocate devices to operator. Operator permissions are as follows:

- Add, edit, and delete macro and group.
- Add, edit, and delete region.
- Deleting, editing, and adding devices are not allowed.

Steps

1. Go to **System Management** → **User Management**.
2. Click **Add**.

Add User
✕

User Name

Admin Password

Password

8 to 16 characters allowed, including at least 2 of the following types:
upper-case letters, lower-case letters and digits.

Confirm Password

Select Associated Device

Select All

<input type="checkbox"/>	ID	Device Type	IP Address	Port No.
<input type="checkbox"/>		IPC/DS-2CD4232F...	192.168.1.1	8000
<input type="checkbox"/>		IPC/DS-2CD4824F...	192.168.1.2	8000
<input type="checkbox"/>		IPC/DS-2CD3T25-I3	192.168.1.3	8000
<input type="checkbox"/>		IPC/DS-2CD883F-E	192.168.1.4	8000

Selected 0 Total 4 Items
<<
<
1/1
>
>>

OK
Cancel

Figure 8-12 Add User

3. Enter user name and password for an operator, and click **OK**.

 **Caution**

We highly recommend you create a strong password of your own choosing (Using a minimum of 8 characters, including at least three of the following categories: upper case letters, lower case letters, numbers, and special characters.) in order to increase the security of your product. And we recommend you reset your password regularly, especially in the high security system, resetting the password monthly or weekly can better protect your product.

4. Check devices to be linked as desired and click **OK**.

 **Note**

- Keyboard supports up to 32 users: 1 administrator and 31 operators.
 - The operator can only operate on the devices allocated.
-

5. Optional: Click **Edit**, uncheck the devices to be unlinked and click **OK** to unlink the devices.

8.6.3 System Maintenance

Go to **System Management** → **System Maintenance** to restart the device, restore defaults, export/import configuration file, etc.

 **Note**

Restoring default settings, importing/exporting configuration files, and remote upgrades require the administrator password to be verified.

Restart

You can restart the network keyboard.

Restore Defaults

- **Simply Restore:** Keep the activation state (administrator password) and the network parameters of the network keyboard, and the remaining parameters will be restored to the default settings.
- **Completely Restore:** Completely restore the parameters to default settings.

Import/Export Configuration File

You can export the configuration file to the computer or import the configuration file from the computer to the keyboard. In case of keyboard failure, you need to back up the data by exporting the configuration file first, and then repair the failure. To copy the data of this keyboard to another keyboard, you can also import/export the configuration file.

 **Note**

- Please set the key for the configuration file when exporting it.
 - The configuration file encrypted and exported is named as configurationdata.
-

- If the configuration file is encrypted, you need to enter the key of the configuration file when importing it.

Remote Upgrade

Click **Browse** to select the upgrade file in the computer, and click **Upgrade** to upgrade the network keyboard remotely.

Note

The upgrade file must be named as digicap.dav.

8.6.4 Log Management

Go to **System Management** → **System Maintenance** → **Log**, select the major and minor types and start and end time of the log, and then search and export the log.

SN	Time	Major Type	Minor Type	Local/Remote User	Remote Host IP	Description
1	2019-11-07 09:44:29	Operation	Power On			
2	2019-11-07 10:21:18	Operation	Local: Login	admin		Keyboard
3	2019-11-07 10:21:26	Operation	Local: Delete the device	admin		Del DEV[10.65....
4	2019-11-07 10:21:27	Operation	Local: Delete the device	admin		Del DEV[10.65....
5	2019-11-07 10:21:28	Operation	Local: Delete the device	admin		Del DEV[10.65....
6	2019-11-07 10:21:28	Operation	Local: Delete the device	admin		Del DEV[10.65....
7	2019-11-07 10:21:28	Operation	Local: Delete the device	admin		Del DEV[10.65....
8	2019-11-07 10:21:29	Operation	Local: Delete the device	admin		Del DEV[10.65....
9	2019-11-07 10:21:33	Operation	Local: Delete the device	admin		Del DEV[10.65....
10	2019-11-07 10:21:34	Operation	Local: Delete the device	admin		Del DEV[10.65....
11	2019-11-07 10:30:12	Operation	Local: Add the device	admin		Add DEV[10.65....
12	2019-11-07 10:30:39	Operation	Local: Add the device	admin		Add DEV[10.65....

Figure 8-13 View Logs

8.6.5 Security Settings

Go to **System Management** → **Security Settings**, and enable or disable SSH and SADP.

- SSH is disabled by default after the network keyboard is restarted.

- When you enable SADP, the keyboard can be searched. When you disable SADP, the keyboard cannot be searched.



See Far, Go Further