

DH-AX15M

AX1500 Wireless Router



- 6th Gen Wireless Technology.
- 1.5 Gbps Wireless speed (300 Mbps@2.4 GHz, 1201Mbps@5 GHz).
- Backward compatible (IEEE 802.11 b/g/n/ac/ax standard).
- Beamforming for better Coverage.
- OFDMA and 1024-QAM.
- Bi-directional MU-MIMO.
- WiFi protected Access(WPA/WPA2/WPA3).
- Guest Wi-Fi.
- Parental Control.



Series Overview

DH-AX15M Gigabit Wireless Router provides wireless access through dual concurrent wireless networks. It provides access to a large number of users, and has wide signal coverage and fast wireless speed. It complies with the IEEE 802.11ax standard, and its wireless speed reaches up to 1,500 Mbps allowing smooth internet access. Using MU-MIMO technology, it supports concurrent connections, greatly reducing network latency. It has a built-in 1 GHz high performance processor, enabling it to have high processing capabilities and fast data transmission speed. It provides excellent wireless networks, and is the good choice for new generation network activities.

Functions

WPA3 Encryption

Adopts 192-bit CNSA (Commercial National Security Algorithm) to prevent brute force attacks on the password. The architecture of the security system also improves the privacy and security of wireless connections, and is strong against network attacks.

Low-power Consumption Technology

Using TWT (Target Wake Time) technology, the router can negotiate when and how often it wakes up to send or receive data, and switches to low-power consumption mode when it is idle. End Devices that access the router can save up to 30% on consumption, improving their battery life.

Intelligent Management

The router can be managed through the WiLynk app which features functions such as router configuration, network topology, parental control, guest Wi-Fi and Wi-Fi sharing. It not only improves router management, but also allows you to conveniently monitor the family network.

High Speed and Low Latency

It leverages 6th Generation Wi-Fi, dual-band Wi-Fi, MU-MIMO, OFDMA and BSS Coloring. This greatly improves the concurrent performance of the router and its anti-interference capabilities on the same frequency band, providing smooth high-speed transmission with low latency for multiple devices.

Scene

Suitable for scenes that require wireless network coverage such as stores and villas.



Villa



Cafe



Supermarket

Technical Specification

Hardware

Physical Port	1 × 10/100/1000Mbps WAN 2 × 10/100/1000Mbps LAN
Power Consumption	<10 W
Memory	128 MB Flash and 128 MB RAM
Indicator Light	1 × WPS 1 × 5GHz, 1 × 2.4GHz 1 × LAN 1 × Internet 1 × PWR
Button	1 × Reset/WPS button
Wireless Standard	2.4 GHz: 802.11 b/g/n 5 GHz: 802.11 a/n/a/ac/ax

Performance

Operating Frequency	2.412 GHz–2.484 GHz 5.150 GHz–5.850 GHz
Wireless Transmission Rate	2.4 GHz: 300 Mbps 5 GHz: 1201 Mbps
Channel Width	20/40/80 MHz
Max. Output Power	20 dBm ± 2 dBm
Antenna Gain	2.4 GHz: 5dBi (±0.5) 5 GHz: 5dBi (±0.5)
Receiver Sensitivity	2.4 GHz 11n HT20_MCS0: -95 dbm 11n HT20_MCS7: -75 dbm 11n HT40_MCS0: -92 dbm 11n HT40_MCS7: -72 dbm 5 GHz 11ac VHT80_MCS0: -89 dbm 11ac VHT80_MCS9: -62 dbm 11ax HE80_MCS0: -89 dbm 11ax HE80_MCS11: -59 dbm
Channel	2.4 GHz: 1-13 5 GHz: 36/40/44/48,52/56/60/64,149/151/153/157/161/165
Connected Wireless Terminals	2.4 GHz: 16 5 GHz: 32

Function


Encryption Mode	WPA-PSK WPA2-PSK WPA3-AES WPA/WPA2-PSK WPA2-PSK/WPA3-AES
Management and Log	NTP; Syslog
Firmware Update	Web/WiLynk App update
OFDMA	Yes
MU-MIMO	2 × 2
DHCP	Yes
NAT	Mapping based on port
QoS	Yes
DDNS	Yes

Parental Controls	Yes
Equipment Management	Web/WiLynk App

General

Power Supply	12 VDC, 1 A
Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
Storage Temperature	-20 °C to +70 °C (-4 °F to 158 °F)
Operating Humidity	10%–90% (RH), non-condensing
Gross Weight	0.56 kg (1.23 lb)
Net Weight	0.26 kg (0.57 lb)
Packaging Dimensions	295 mm × 285 mm × 70 mm (11.61" × 11.22" × 2.76") (L × W × H)
Product Dimensions	215 mm × 119 mm × 173 mm (8.46" × 4.67" × 6.81") (L × W × H)
Statics Protection	Air discharge: 8 kV Contact discharge: 4 kV
Lighting Protection	Common mode: 2.5 kV Differential mode: 0.5 kV
Installation	Desktop mount
Packing List	1 × Device 1 × Power adapter 1 × Network cable 1 × User's manual

Dimensions (mm [inch])

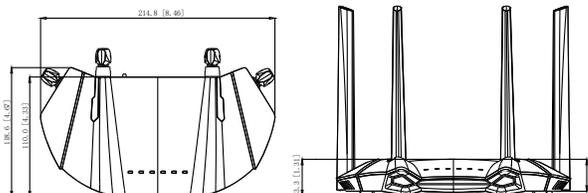

Panels

